

A

## In the United States Patent and Trademark Office

Applicants: Mark Alan Burazin; Edward Joseph VanRengen; Kenneth Curtis Larson; Jerome Steven Veith; Ralph L. Anderson; Michael William Veith      Docket No.: 13,497.2

Serial No.: Unknown      Group: Unknown  
Filed: Herewith      Examiner: Unknown  
For: ROLLS OF TISSUE SHEETS HAVING IMPROVED PROPERTIES



Express Mail      EJ803479239US      Date: November 17, 1999

### Transmittal Letter

#### Request for Continuation-in-Part Application under 37 CFR 1.53(b)(2)

#### Plural Inventors

ASSISTANT COMMISSIONER FOR PATENTS

#### BOX PATENT APPLICATION

Washington, D.C. 20231

Dear Sir:

Applicants hereby request the filing of a continuation-in-part application in accordance with the provisions of 37 C.F.R. 1.53(b)(2).

Enclosed are:

1. This Transmittal Form including Fee Authorization and a duplicate for fee processing.
2. A Specification having a total of thirty (30) pages, including a one (1) page Abstract and forty-seven (47) claims.
3. Fifteen (15) sheets of drawings.
4. A Combined Declaration and Power of Attorney - unsigned.

Please amend the specification of this application by inserting, at the beginning thereof, the following:

-- This application is a continuation-in-part of application serial number 09/166,863 entitled ROLLS OF TISSUE SHEETS HAVING IMPROVED PROPERTIES and filed in the U.S. Patent and Trademark Office on October 6, 1998. The entirety of application serial number 09/166,863 is hereby incorporated by reference. --

The filing fee, pursuant to 37 C.F.R. 1.16(a), (b), (c) and (d), has been calculated, after entry, if applicable, of any amendments, as follows:

	Number Filed		Number Extra	Rate	Fee
Total Claims	53	-20 =	33	x 18 (fee)	\$594.00

Independent Claims	13	-3	=	10	code 103)= x 78 (fee code 102) =	\$780.00
First Presentation of Multiple Dependent Claims					+ 260 (fee code 104) =	\$260.00
					Base Fee (fee code 101)	\$760.00
					TOTAL	\$2,394.00

Please charge Kimberly-Clark Worldwide, Inc. deposit account number 11-0875 for (1) the filing fee indicated in the TOTAL above; and (2) any patent application processing fees required under 37 C.F.R. 1.17.

In the event the filing fee indicated in the TOTAL above has been incorrectly calculated, please charge any additional filing fee or credit any excess in the filing fee to Kimberly-Clark Worldwide, Inc. deposit account number 11-0875.

Please address all correspondence to: Gregory E. Croft, Kimberly-Clark Worldwide, Inc., 401 North Lake Street, Neenah, Wisconsin 54957-0349.

This transmittal letter is submitted in duplicate.

The undersigned may be reached at telephone number (920) 721-3616 or fax number (920) 721-3129.

Respectfully submitted,

MARK ALAN BURAZIN ET AL.

By: Gregory E. Croft  
 Gregory E. Croft  
 Registration No.: 27,542

#### CERTIFICATE OF MAILING

I, Lanette Burton, hereby certify that on November 17, 1999 this document is being deposited with the United States Postal Service, postage prepaid, Express Mail No. EJ803479239US in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By: Lanette Burton  
 Lanette Burton

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Mark A. Burazin et al.                      Docket No: 13497.2  
Serial No.: Unknown                      Group No: Unknown  
Filed: Herewith                      Examiner: Unknown  
For: ROLLS OF TISSUE SHEETS HAVING IMPROVED PROPERTIES

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

EXPRESS MAIL CERTIFICATE

"Express Mail" label number: EJ803479239US

Date of deposit: November 17, 1999


I hereby certify that the following attached paper or fee

Thirty pages of specification including 47 claims and one sheet of abstract

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Lanette Burton

(Typed or printed name of person mailing paper or fee)



(Signature of person mailing paper or fee)

Note: **Each** paper must have its own certificate and the "Express Mail" label number as a part thereof or attached thereto. When, as here, the certification is presented on a separate sheet, that sheet must (1) **be signed** and (2) **fully identify and be securely attached to the paper or fee it accompanies**. Identification should include the serial number and filing date of the application as well as the type of paper being filed, e.g., complete application, specification and drawings, responses to rejection or refusal, notice of appeal, etc. If the serial number of the application is not known, the identification should include at least the name of the inventor(s) and the title of the invention.

Note: The label number need not be placed on each page. It should, however, be placed on the first page of each separate document, such as, a new application, amendment, assignment, and transmittal letter for a fee, along with the certificate of mailing by "Express Mail". Although the label number may be on checks, such a practice is not required. In order not to deface formal drawings, it is suggested that the label number be placed on the back of each formal drawing or the drawings be accompanied by a set of informal drawings on which the label number is placed.

## ROLLS OF TISSUE SHEETS HAVING IMPROVED PROPERTIES

### Background of the Invention

Throughdried tissues have recently been developed which provide a unique combination of bulk and softness. In part, a method for making such tissues includes the use of a throughdrying fabric having high and long machine direction knuckles which impart a high degree of texture to the resulting tissue sheet. When such sheets are used  
5 for making bath tissue or paper toweling, they are wound into a roll for sale to the consumer. However, in spite of the high bulk and texture of the resulting tissue sheet, when wound into a roll the sheet has a tendency to "nest" as the protrusions of the sheet mate with corresponding depressions of the adjacent sheet in the wound roll. As a result, the wound roll has good firmness, but does not exhibit exceptional roll bulk befitting of the  
10 high texture exhibited by the sheet itself.

Therefore there is a need for a method of imparting good firmness and high bulk to rolls of tissue sheets having high bulk and texture.

### Summary of the Invention

15 It has now been discovered that the bulk/firmness properties of rolls of tissue sheets, including throughdried tissue sheets, can be improved by modifying the fabrics used in the process of manufacturing the tissue sheet. The resulting rolls have both a high degree of bulk and firmness, particularly for rolls made from relatively soft sheets.

Hence in one aspect, the invention resides in a method of making a throughdried  
20 tissue sheet comprising (a) depositing an aqueous suspension of papermaking fibers onto a forming fabric to form a wet web; (b) dewatering the wet web to a consistency from about 20 to about 30 percent; (c) transferring the dewatered web from the forming fabric to the sheet side of a transfer fabric traveling at a speed from about 10 to about 80 percent slower than the forming fabric; (d) transferring the web to a throughdrying fabric

25 having from about 5 to about 300 impression knuckles per square inch which are raised at

least about 0.005 inch above the plane of the fabric, wherein the web is macroscopically rearranged to conform to the surface of the throughdrying fabric; and (e) throughdrying the web, wherein the sheet side of the transfer fabric contains cross-machine direction (CD) dominant troughs which impart cross-machine direction dominant bar-like

5 protrusions to the air side of the tissue sheet.

As used herein, the "dryer side" of the tissue sheet is the side of the sheet facing the throughdrying fabric during throughdrying and the "air side" of the sheet is the side of the sheet facing away from the throughdrying fabric during throughdrying. When the sheet is wound into a roll of product, it is often preferred that the air side of the sheet be  
10 the side of the sheet facing the core of the roll and the dryer side of the sheet be the outwardly facing side of the sheet.

Also as used herein, the term "cross-machine direction dominant" means that the bar-like protrusions or troughs run at an angle of about 44° or less, more specifically about 20° or less, and still more specifically about 10° or less, relative to the cross-machine  
15 direction of the sheet or fabric. The bar-like protrusions can be parallel with the cross-machine direction of the sheet. Similarly, the term "machine direction dominant" means that the feature in question runs at an angle of about 44° or less, more specifically about 20° or less, and still more specifically about 10° or less, relative to the machine direction of the sheet or fabric. The machine direction dominant feature in question can also be  
20 parallel or substantially parallel to the machine direction of the sheet or fabric.

The bar-like protrusions can extend continuously across the width of the sheet but, due to some slippage of the woven fabric filaments, in practice the bar-like protrusions within a given sheet randomly vary in length. Accordingly, the length of the bar-like protrusions can be about 3 millimeters or greater, more specifically from about 3  
25 millimeters to about 300 millimeters, more specifically from about 5 millimeters to about 50 millimeters, and still more specifically from about 5 millimeters to about 25 millimeters, including combinations of the foregoing ranges. The width of the bar-like protrusions corresponds to the spacing between the CD dominant filaments of the transfer fabric and can be about 0.3 millimeter or greater, more specifically from about 0.3 to about 3  
30 millimeters, still more specifically from about 0.5 to about 1.5 millimeters. In addition, single CD dominant filaments within the transfer fabric can be replaced with multiple CD dominant filaments piled atop each other to form deeper CD dominant troughs within the fabric and therefore form higher bar-like protrusions in the air side of the sheet.

In another aspect, the invention resides in a tissue sheet having an air side and a  
35 dryer side, the dryer side of the sheet having parallel discontinuous rows of machine

direction dominant pillow-like elevated regions, which can be imparted to the sheet by the spaces between high and long machine direction dominant knuckles in the throughdryer fabric, wherein the discontinuities in the rows of pillow-like elevated regions are cross-machine direction dominant troughs that appear as cross-machine direction dominant bar-  
 5 like protrusions on the air side of the sheet. The discontinuities in the rows of pillow-like elevated regions substantially suppress the tendency of the rows of pillow-like elevated regions in the sheet from nesting when the sheet is wound into a roll.

In another aspect, the invention resides in a method of making a throughdried tissue sheet comprising (a) depositing an aqueous suspension of papermaking fibers  
 10 having a consistency of about 1 percent or less onto a forming fabric to form a wet web; (b) dewatering the wet web to a consistency from about 20 to about 30 percent; (c) transferring the dewatered web from the forming fabric to a transfer fabric traveling at a speed from about 10 to about 80 percent slower than the forming fabric; (d) transferring the web to a throughdrying fabric having from about 5 to about 300 impression knuckles  
 15 per square inch which are raised at least about 0.005 inch above the plane of the fabric, wherein the web is macroscopically rearranged to conform to the surface of the throughdrying fabric; and (e) throughdrying the web, wherein the throughdrying fabric has an offset seam which results in the machine direction yarns of the throughdrying fabric being disposed at an angle of about 2° or less, more specifically about 1° or less, still  
 20 more specifically from about 0.05° to about 1°, and still more specifically from about 0.1° to about 0.6° relative to the machine direction of the fabric. As used herein, the term "offset" means that the seam is formed after the edges of the fabric have been displaced in the cross-machine direction beyond that which may occur inadvertently during normal seaming operations. The concept of an offset seam will be more fully described in the  
 25 description of Figure 11.

In another aspect, the invention resides in a tissue sheet comprising generally parallel rows of elevated pillow-like regions running at an acute angle relative to the machine direction of the sheet. The angle can be from about 0.05° to about 2°, more specifically from about 0.05° to about 1°, and still more specifically from about 0.1° to  
 30 about 0.6°. The angle results from an offset seam in the throughdrying fabric and substantially suppresses the tendency of the sheet to nest when wound into rolls. A similar result can be achieved with a conventionally seamed fabric, but by oscillating the roll upon which the web is being wound at an amplitude and frequency which suppresses the tendency of the features of the web to line up and nest and increases the roll bulk/roll

firmness ratio relative to a roll of the same sheet material wound without oscillating the roll.

In another aspect, the invention resides in a roll of tissue having a roll bulk of 16 cubic centimeters or greater per gram and a roll firmness of 8 millimeters or less.

5 In another aspect, the invention resides in a roll of tissue having a roll bulk/roll firmness ratio of 20 or more square centimeters per gram and a sheet caliper from about 0.02 to about 0.05 inch.

In another aspect, the invention resides in a roll of tissue having a roll bulk/roll firmness ratio of 20 or more square centimeters per gram and a geometric mean stiffness  
10 of about 8 or less.

In another aspect, the invention resides in a roll of tissue having a roll bulk/roll firmness/single sheet caliper ratio of about 350 or more centimeters per gram and a geometric mean stiffness of about 8 or less.

The roll bulk for rolls of tissue made in accordance with this invention can be 16  
15 cubic centimeters or greater per gram of fiber, more specifically about 17 cubic centimeters or greater per gram of fiber, and still more specifically from about 17 to about 20 cubic centimeters per gram.

The roll firmness of rolls of tissue made in accordance with this invention can be about 11 millimeters or less, more specifically about 8 millimeters or less, more  
20 specifically about 7 millimeters or less, more specifically about 6 millimeters or less, and still more specifically from about 4 to about 7 millimeters.

The roll bulk/roll firmness ratio of rolls of tissue made in accordance with this invention can be 20 or more square centimeters per gram, more specifically about 25 or more square centimeters per gram, and still more specifically from about 25 to about 55  
25 square centimeters per gram.

The single sheet caliper of the tissue sheets useful for purposes of this invention can be from about 0.02 to about 0.05 inch (0.51 to about 1.27 millimeters), more specifically from about 0.025 to about 0.045 inch (0.64 to about 1.14 millimeters).

The geometric mean stiffness of the tissue sheets useful for purposes of this  
30 invention can be about 8 or less, more specifically about 5 or less, and still more specifically from about 2 to about 5.

The roll bulk/roll firmness/single sheet caliper ratio of rolls of tissue in accordance with this invention can be about 350 or more centimeters per gram, more specifically about 390 or more centimeters per gram, more specifically about 430 or more centimeters  
35 per gram, and still more specifically from about 350 to about 550 centimeters per gram.

In addition to the above-mentioned properties which directly relate to or impact the properties of a wound roll of product, the absorbent capacity of the sheets useful for purposes of this invention can be about 5 or more grams of water per gram of fiber, more specifically from about 5 to about 8 grams of water per gram of fiber, and still more

5 specifically from about 5.5 to about 7 grams of water per gram of fiber.

Also, the absorbent rate of sheets useful for purposes of this invention can be about 4 seconds or less, more specifically from about 1 to about 4 seconds, and still more specifically from about 2 to about 3 seconds.

The Horizontal Wicking rate for sheets in accordance with this invention can be 2.0  
10 or greater, more specifically about 2.3 or greater, more specifically about 2.5 or greater, more specifically about 2.8 or greater, more specifically from 2.0 to 3, and still more specifically from about 2.2 to about 2.8. Horizontal Wicking rate values are expressed as centimeters per the square root of seconds as described below.

The Wipe Dry area, expressed in square centimeters as described below, for  
15 sheets in accordance with the invention can be from about 650 to 1000, more specifically from about 700 to 1000, more specifically from about 800 to 1000, and still more specifically from about 900 to 1000 square centimeters.

The unique absorbent properties of the sheets of this invention are at least in part due to the "ridges" in the sheet that interact with the surface to be wiped to form wicking  
20 channels. These channels have a cross-sectional area of about 500,000 square microns or less and can be straight or non-straight.

As used herein, "roll bulk" is the bulk of the wound product, excluding the core volume, and is most easily understood with reference to Figure 2. Figure 2 illustrates a typical roll product having a core, around which the paper product is wound. The radius of  
25 the roll product is designated as "R", whereas the radius of the core is designated as "r". The width or length of the roll is designated as "L". All measurements are expressed as "centimeters". The product roll volume "RV", expressed in cubic centimeters (cc), is the volume of the product minus the volume of the core, namely  $RV = (\pi R^2 L) - (\pi r^2 L)$ . The product roll weight "W" is the weight of the roll minus the weight of the core, measured in  
30 grams (g). Alternatively, the roll weight "W" can be calculated by multiplying the basis weight of the sheet, expressed in grams per square meter, by the area of the sheet (length times width), expressed in square meters. Either way, the "roll bulk", expressed in cubic centimeters per gram (cc/g), is "RV" divided by "W".

As used herein, "roll firmness" is a measure of the extent a probe can penetrate  
35 the roll under controlled conditions and is readily understood with reference to Figure 3,



which illustrates the apparatus used for determining roll firmness. The apparatus is available from Kershaw Instrumentation, Inc., Swedesboro, NJ and is known as a Model RDT-101 Roll Density Tester. Shown in Figure 3 is a towel roll 80 being measured, which is supported on a spindle 81. When the test begins a traverse table 82 begins to move  
5 toward the roll. Mounted to the traverse table is a sensing probe 83. The motion of the traverse table causes the sensing probe to make contact with the towel roll. When the sensing probe contacts the roll, the force exerted on the load cell exceeds the low set point of 6 grams and the displacement display is zeroed and begins indicating the penetration of the probe. When the force exerted on the sensing probe exceeds the high  
10 set point of 687 grams, the traverse table stops and the displacement display indicates the penetration in millimeters. The tester records this reading. Next the tester rotates the towel roll 90° on the spindle and repeats the test. The roll firmness value is the average of the two readings, expressed in millimeters. The test is performed in a controlled environment of  $73.4 \pm 1.8^{\circ}\text{F}$  and  $50 \pm 2\%$  relative humidity. The rolls are conditioned in  
15 this environment at least 4 hours before testing.

As used herein, "geometric mean stiffness" is the geometric mean slope divided by the geometric mean tensile strength; where the geometric mean tensile strength is the square root of the product of the machine direction tensile strength and the cross-machine direction tensile strength, expressed in grams per 3 inches (7.62 cm); and where the  
20 geometric mean slope is the square root of the product of the machine direction slope and the cross machine direction slope, expressed in grams per 3 inches (7.62 cm); and where machine direction slope and cross machine direction slope are as described in U.S. 5,746,887 issued May 5, 1998 to Wendt et al. entitled Method of Making Soft Tissue Products, which is hereby incorporated by reference.

25 As used herein, the "single sheet caliper" is measured in accordance with TAPPI test method T402 "Standard Conditioning and Testing Atmosphere For Paper, Board, Pulp Handsheets and Related Products" and is measured as one sheet using an EMVECO 200-A Microgauge automated micrometer (EMVECO, Inc., Oregon). The micrometer has an anvil diameter of 2.22 inches (56.4 millimeters) and an anvil pressure  
30 of 132 grams per square inch (per 6.45 square centimeters) (2.0 kPa).

As used herein, the "absorbent capacity" of tissue sheets is determined by cutting the tissue sheets into 4 inches by 4 inches squares, placing twenty squares into a stack such that all squares are oriented the same relative to the machine direction of the tissue, and stapling the corners of the stack together to form a 20 sheet pad. The pad is placed  
35 into a wire mesh basket with the staple points down and lowered into a water bath held at

a temperature of  $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ . When the pad is completely wetted, it is removed and allowed to drain for 30 seconds while in the wire basket. The weight of the water remaining in the pad after 30 seconds is the amount absorbed. This value is divided by the weight of the pad to determine the absorbent capacity, which for purposes herein is

5 expressed as grams of water absorbed per gram of fiber.

As used herein, the "absorbent rate" of tissue sheets is determined by same procedure as for the absorbent capacity, except the size of the pad is 2.5 inches by 2.5 inches. The time taken for the pad to completely wet out after being lowered into the water bath is the absorbent rate, expressed in seconds. Higher numbers mean that the

10 rate at which water is absorbed is slower.

As used herein, the "Horizontal Wicking" test measures the rate of liquid transport through a material placed on a flat surface. The test is a useful research tool for screening materials. Essentially the test measures the location of liquid wetting front in the material as a function of time. The wetting front images are captured and analyzed digitally.

15 The Horizontal Wicking setup is illustrated in Figure 13. The reservoir maintains its liquid level through a vented flask. Next to the reservoir sits a horizontal platform in line with reservoir liquid level. The sample absorbent material is placed on the platform with one end in contact with the reservoir liquid. Mounted above the platform is a black and white digital camera, which records and transfers images to a PC via a frame grabber. A  
20 custom program, which uses image analysis software, captures images at previously specified time intervals and determines the distance the fluid wetting front wicks as a function of time. Data are plotted as distance versus square root of time. The rate of liquid absorption is reported as a slope which is obtained by using least squares linear regression technique.

#### 25 Test Setup and Procedure:

The vented flask is filled with liquid of interest. The lower end of the vent in the flask is kept at the reservoir liquid level. The stopcock, between the vented flask and the reservoir, is kept closed while filling the flask or draining the reservoir. The  
30 reservoir has two valves at the base, one connecting it to the flask and the other used to drain it. The platform for placing samples is a stainless steel plate 14" long and 3.5" wide. The platform, the reservoir, and the camera are all fixed into a lighted chamber.

35 Before testing the imaging software is configured. This is required to establish material brightness and to determine gray scale differentiation for optimal detection

of the liquid wetting front. After completing the software configuration the actual test can begin.

5 The test is conducted on single-layered porous materials only. It is not conducted on multilayered materials or SAP containing composites. The platform size limits the sample width to be less than 3.5 inches. A good samples size is close to 10" x 1.5". For materials in which the pores have an orientation, samples should be cut with length in the direction of wicking in the actual product. To reduce the effect of densification on the edges of the sample a textile saw is recommended for cutting. 10 After cutting, the sample weight and bulk are recorded. For materials sensitive to temperature and humidity, conditioning and testing is carried out at  $23 \pm 1$  C ( $73.4 \pm 1.8$  F) and  $50 \pm 2$  % relative humidity.

15 In the beginning the liquid in the reservoir is drained to a level of .25" inches below it's crest. Then the sample is laid onto the platform with .5" inches extending into the reservoir. At the same time the imaging program is initiated to capture five images per second until liquid is detected in the sample. The experiment is initiated by opening the stopcock between the vented flask and the reservoir; this allows the reservoir to fill to its crest and come in contact with the sample. Once 20 liquid is detected in the sample the software begins capturing the images at equal intervals and calculates distance of wetting front from the origin. After the desired number of data points have been captured, the sample is removed from the platform, and the stopcock between the flask and reservoir is allowed to drain the reservoir.

25 The software transfers the data automatically from the imaging software into an Excel spreadsheet. Time is transformed to square root time.

Methods for making throughdried tissues generally in accordance with this invention are described in U.S. 5,656,132 entitled "Soft Tissue" issued August 12, 1997 to Farrington et al. and U.S. 5,672,248 entitled "Method of Making Soft Tissue Products" 30 issued September 30, 1997 to Wendt et al., both of which are hereby incorporated by reference.

The tissue sheets useful for purposes of this invention can have one, two, three or more plies and can be wet-pressed, throughdried, uncreped throughdried or wet molded and dried. They can be used for facial tissues, bath tissues, paper towels, dinner napkins

and the like, although the greatest utility can be found in roll product forms such as bath tissue and paper towels.

#### Brief Description of the Drawings

5           Figure 1 illustrates a schematic view of the method for making uncreped throughdried tissues in accordance with this invention.

          Figure 2 is a schematic figure of a typical roll product, illustrating the calculation of "roll bulk".

10           Figure 3 is a schematic representation of the apparatus used for measuring "roll firmness".

          Figure 4 is a plot of roll bulk versus roll firmness for products of this invention (labeled "I1" - "I13" corresponding to Examples 1 - 13 below), a control point (labeled "Control") made without the methods of this invention as described in Example 14, and a variety of commercially available paper towels (collectively labeled "C1" or "C2" depending upon whether or not they are 1- or 2-ply products, respectively), illustrating the combination of high roll bulk and high roll firmness attained by the products of this invention.

          Figure 5 is a plot of the roll bulk/roll firmness ratio versus single sheet caliper for products of this invention and a variety of commercially available paper towels with data points labeled as in Figure 4, illustrating the efficiency of the methods of this invention for attaining firm, bulky rolls with tissue sheets of a given caliper.

          Figure 6 is a plot of the roll bulk/roll firmness ratio versus the geometric mean stiffness, similar to Figures 4 and 5 above, illustrating the ability of the methods of this invention to provide a high degree of bulk and firmness with soft (less stiff) sheets.

25           Figure 7 is a plot of the roll bulk/roll firmness/single sheet caliper ratio versus the geometric mean stiffness, similar to Figures 4, 5 and 6 above, further illustrating the efficiency of the methods of this invention in providing quality bulk and firmness for soft tissue sheets of a given caliper.

          Figures 8A and 8B are photographs of the dryer side (top side) of an uncreped throughdried tissue sheet made in accordance with this invention and a similar sheet made without using the methods of this invention, respectively, illustrating the parallel rows of elevated pillow-like regions in the machine direction which are interrupted by the cross-machine direction dominant troughs imparted to the sheet by the transfer fabric.

          Figures 9A and 9B are photographs of the air side (bottom side) of the sheets of Figures 8A and 8B, respectively, further illustrating the bar-like impressions imparted to



which is hereby incorporated by reference. More particularly, referring to a transfer fabric as illustrated in Figure 6 of Chiu, the sheet side of the transfer fabric is the side of the fabric having the long cross-machine direction dominant floats created by filaments 144, and the cross-machine dominant bars in the sheet imparted by the transfer fabric

5 correspond to the troughs formed between cross-machine direction dominant filaments 144.

The web is then transferred from the transfer fabric to the throughdrying fabric 19 with the aid of a vacuum transfer roll 20 or a vacuum transfer shoe. The throughdrying fabric can be traveling at about the same speed or a different speed relative to the

10 transfer fabric. If desired, the throughdrying fabric can be run at a slower speed to further enhance MD stretch. Transfer is preferably carried out with vacuum assistance to ensure deformation of the sheet to conform to the throughdrying fabric, thus yielding desired bulk, flexibility, CD stretch and appearance. The throughdrying fabric is preferably of the high and long impression knuckle type generally described in Wendt et al.

15 The level of vacuum used for the web transfers can be from about 3 to about 15 inches of mercury (75 to about 380 millimeters of mercury), preferably about 10 inches (254 millimeters) of mercury. The vacuum shoe (negative pressure) can be supplemented or replaced by the use of positive pressure from the opposite side of the web to blow the web onto the next fabric in addition to or as a replacement for sucking it

20 onto the next fabric with vacuum. Also, a vacuum roll or rolls can be used to replace the vacuum shoe(s).

While supported by the throughdrying fabric, the web is final dried to a consistency of about 94 percent or greater by the throughdryer 21 and thereafter transferred to a carrier fabric 22. The dried basesheet 23 is transported to the reel 24 using carrier fabric

25 22 and an optional carrier fabric 25. An optional pressurized turning roll 26 can be used to facilitate transfer of the web from carrier fabric 22 to fabric 25. Suitable carrier fabrics for this purpose are Albany International 84M or 94M and Asten 959 or 937, all of which are relatively smooth fabrics having a fine pattern. Although not shown, reel calendering or subsequent off-line calendering can be used to improve the smoothness and softness

30 of the basesheet.

Figures 2 and 3 have been previously described in connection with the roll bulk and roll firmness measurements.

Figures 4, 5, 6 and 7 are plots comparing certain properties of commercially available products with the products of this invention made in accordance with the

35 Examples described below.

Figures 8A and 8B are photographs of the dryer side of an uncreped throughdried tissue sheet made in accordance with this invention (8A) and a similar sheet made without using the methods of this invention (8B). Referring to Figure 8A, shown are the parallel rows of elevated pillow-like regions 85 running in the machine direction which are

5 interrupted by the cross-machine direction dominant troughs 86 in the tissue sheet of this invention. In Figure 8B, structure corresponding to the cross-machine dominant troughs is absent.

Figures 9A and 9B are photographs of the air side of the sheets of Figures 8A and 8B, respectively. Shown are the CD dominant bar-like protrusions 91 imparted to the air  
10 side of the tissue sheet by the transfer fabric.

Figure 10 is a photograph of the sheet side of an Appleton Mills 2054-A33 transfer fabric used to impart the cross-machine direction dominant bar-like protrusions to the air side of the sheet illustrated in Figures 8A and 9A in accordance with an aspect of this invention.

15 Figures 11A, 11B and 11C are schematic diagrams illustrating the steps used to make a fabric with an offset seam for purposes of this invention. Initially, as shown in Figure 11A, the fabric 100 is laid flat and the degree of offset is determined. Parallel offset lines 102 and 103 are drawn near the edges of the fabric as shown. The angle of these lines relative to the edge of the fabric represents the degree of offset relative to the  
20 machine direction of the fabric. The fabric is then formed into a continuous loop with the offset lines aligned as shown in Figure 11B. The two adjacent edges of the fabric are then seamed together. The excess fabric material is then trimmed away using a hot knife or other suitable means, leaving an offset fabric as illustrated in Figure 11C. As a result of this method, the seam 104 of the resulting fabric is not perpendicular to the machine  
25 direction of the fabric.

### Examples

#### Example 1.

30 An uncreped throughdried tissue sheet was made in accordance with this invention as described above in connection with Figure 1. More specifically, a non-layered single ply towel tissue was made using a furnish comprising 50 dry weight percent northern softwood kraft fiber (NSWK), 25 % northern softwood bleached chemi-thermomechanical fiber (BCTMP), and 25 % southern hardwood kraft fiber (SHWK).

The NSWK fiber was pulped for 30 minutes at approximately 4 percent consistency and diluted to approximately 3.2 percent after pulping. The BCTMP and SHWK fibers were combined together in a 50:50 ratio and pulped for 30 minutes at approximately 4 percent consistency and diluted to approximately 3.2 percent after  
5 pulping. Kymene 557LX was added to both pulp streams at 10 kilograms per metric ton of pulp based on total flow. The NSWK fibers were refined at 1.0 horsepower-day (0.75 kW days) per metric ton. The pulp streams were then blended and diluted to approximately 0.18 % consistency. The diluted suspension was fed to a C-wrap, twin wire, suction form roll, former with forming fabrics (12 and 13) being an Asten 867A and  
10 an Appleton Mills (AM) 2164-B33 fabric respectively. The speed of both of the forming fabrics was 1562 feet per minute (7.93 meters/second). The newly formed web was then de-watered to a consistency of about 24 percent using vacuum suction from below the forming fabric before being transferred to the transfer fabric (17) traveling at 1250 fpm (25 % rush transfer.) The transfer fabric was an Appleton Mills 2054-A33 run with the coarse  
15 CD dominant filaments to the sheet side. (See Figure 10). A vacuum shoe pulling 6 inches (152 millimeters) of mercury vacuum was used to transfer the web to the transfer fabric.

The web was then transferred to a throughdrying fabric (19), which was an Appleton Mills t1205-1. The through drying fabric was traveling at a speed of about 1250  
20 feet per minute (6.35 meters/second). The web was carried over a Honeycomb through-dryer operating at a temperature of about 350°F (177°C) and dried to final dryness of about 97 percent consistency. The resulting uncreped tissue sheet was then calendered at a fixed gap of 0.011 inch (0.028 millimeter) between two 20 inches (508 millimeters) diameter steel rolls and wound into finished product rolls on 1.6 inches (40.6 millimeters)  
25 diameter cores.

The resulting finished product had the following properties: basis weight, 22.8 pounds per 2880 square feet (38.6 grams per square meter); MD tensile, 2480 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2370 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 20.1 percent; CD stretch 9.0 percent; MD slope,  
30 6.05 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 9.29 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 3.10; single sheet caliper, 0.033 inch (0.84 millimeter); roll bulk, 16.7 cubic centimeters per gram; roll firmness, 4.16 millimeters; roll bulk divided by roll firmness, 40.1 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 480 centimeters



per gram; absorbent capacity, 6.1 grams water per gram fiber; absorbent rate, 1.9 seconds; roll diameter, 5.19 inch (132 millimeters); roll length, 60.0 feet (18.3 meters).

Example 2.

5 A single ply towel was made as described in Example 1 except the furnish consisted of 50 percent NSWK, 25 % BCTMP, and 25 % northern hardwood kraft fiber (NHWK), the NSWK was refined at 1.5 horsepower-days (1.1 kW) per metric ton, the throughdrying fabric was an Appleton Mills t1205-2 fabric, and the resulting basesheet was calendered at a fixed gap of 0.007 inch (0.178 millimeter).

10 The resulting finished product had the following properties: basis weight, 22.4 pounds per 2880 square feet (38.1 grams per square meter); MD tensile, 2540 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 1680 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 18.7 percent; CD stretch 10.3 percent; MD slope, 5.43 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 6.36 kilograms per  
15 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 2.84; single sheet caliper, 0.034 inch (0.86 mm); roll bulk, 17.1 cubic centimeters per gram; roll firmness, 7.1 millimeters; roll bulk divided by roll firmness, 24.1 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 280 centimeters per gram; absorbent capacity, 6.56 grams water per gram fiber; absorbent rate, 3.3 seconds; roll  
20 diameter, 5.20 inch (132 millimeters); roll length, 62.5 feet (19.1 meters).

Example 3.

A single ply towel was made as described in Example 2 except the transfer fabric was an Appleton Mills t1605-2 fabric and the throughdrying fabric was an Appleton Mills  
25 t1205-2 off-seamed fabric at a finished offset angle of 0.273 degrees.

The resulting finished product had the following properties: basis weight, 21.8 pounds per 2880 square feet (37.1 grams per square meter); MD tensile, 2130 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 1970 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 17.5 percent; CD stretch 13.0 percent; MD slope,  
30 9.13 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 5.06 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 3.31; single sheet caliper, 0.034 (0.86 mm); roll bulk, 19.4 cubic centimeters per gram; roll firmness, 5.85 millimeters; roll bulk divided by roll firmness, 33.2 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 390 centimeters per gram;

absorbent capacity, 6.78 grams water per gram fiber; absorbent rate, 2.2 seconds; roll diameter, 5.43 inch (138 millimeters); roll length, 62.5 feet (19.1 meters).

Example 4.

- 5           A single ply towel was made as described in Example 3 except the resulting basesheet was calendered at a fixed gap of 0.005 inch (0.127 millimeter).

          The resulting finished product had the following properties: basis weight, 21.6 pounds per 2880 square feet (36.7 grams per square meter); MD tensile, 2250 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 1660 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 18.5 percent; CD stretch 11.8 percent; MD slope, 8.98 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 4.47 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 3.28; single sheet caliper, 0.032 inch (0.81 mm); roll bulk, 19.1 cubic centimeters per gram; roll firmness, 6.20 millimeters; roll bulk divided by roll firmness, 30.8 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 380 centimeters per gram; absorbent capacity, 6.83 grams water per gram fiber; absorbent rate, 2.1 seconds; roll diameter, 5.35 inch (136 millimeters); roll length, 62.5 feet (19.1 meters).

Example 5.

- 20           A single ply towel was made as described in Example 3 except the NSWK was refined at 3.0 horsepower-days (2.2 kW days) per metric ton, Kymene 557LX was added at a rate of 12 kilograms per metric ton of fiber, the transfer fabric was an Appleton Mills t216-3 fabric, and the resulting basesheet was calendered at a fixed gap of 0.005 inch (0.127 millimeters).

25           The resulting finished product had the following properties: basis weight, 22.2 pounds per 2880 square feet (37.8 grams per square meter); MD tensile, 2870 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2460 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 18.3 percent; CD stretch 11.3 percent; MD slope, 11.1 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 6.20 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 3.12; single sheet caliper, 0.029 inch (0.74 mm); roll bulk, 18.1 cubic centimeters per gram; roll firmness, 4.85 millimeters; roll bulk divided by roll firmness, 37.3 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 500 centimeters per gram; absorbent capacity, 6.0 grams water per gram fiber; absorbent rate, 2.5 seconds; roll diameter, 5.32 inch (135 millimeters); roll length, 62.5 feet (19.1 meters).

Example 6.

A single ply towel was made as described in Example 5 except the resulting basesheet was calendered at a fixed gap of 0.007 inch (0.178 millimeter).

- 5        The resulting finished product had the following properties: basis weight, 22.3 pounds per 2880 square feet (37.9 grams per square meter); MD tensile, 3330 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2610 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 20.3 percent; CD stretch 11.7 percent; MD slope, 10.9 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 6.85 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 2.92; single sheet caliper, 0.032 inch (0.81 mm); roll bulk, 19.3 cubic centimeters per gram; roll firmness, 5.0 millimeters; roll bulk divided by roll firmness, 38.6 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 480 centimeters per gram; absorbent capacity, 6.14 grams water per gram fiber; absorbent rate, 2.5 seconds; roll diameter, 5.47 inch (139 millimeters); roll length, 62.5 feet (19.1 meters).
- 10
- 15

Example 7.

A single ply towel was made as described in Example 5 except the transfer fabric was an Appleton Mills 2054-A33.

- 20        The resulting finished product had the following properties: basis weight, 22.1 pounds per 2880 square feet (37.6 grams per square meter); MD tensile, 3260 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2120 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 19.1 percent; CD stretch 9.4 percent; MD slope, 5.98 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 9.4 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 2.85; single sheet caliper, 0.031 inch (0.79 mm); roll bulk, 17.6 cubic centimeters per gram; roll firmness, 4.90 millimeters; roll bulk divided by roll firmness, 35.9 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 460 centimeters per gram; absorbent capacity, 5.86 grams water per gram fiber; absorbent rate, 2.74 seconds; roll diameter, 5.24 inch (133 millimeters); roll length, 62.5 feet (19.1 meters).
- 25
- 30

Example 8.

A single ply towel was made as described in Example 7 except the resulting basesheet was calendered at a fixed gap of 0.007 inch (0.178 millimeter).

The resulting finished product had the following properties: basis weight, 22.3 pounds per 2880 square feet (37.9 grams per square meter); MD tensile, 3330 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2270 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 17.4 percent; CD stretch 10.5 percent; MD slope, 6.6 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 8.8 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 2.8; single sheet caliper, 0.032 inch (0.81 mm); roll bulk, 18.4 cubic centimeters per gram; roll firmness, 4.45 millimeters; roll bulk divided by roll firmness, 41.3 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 510 centimeters per gram; absorbent capacity, 5.98 grams water per gram fiber; absorbent rate, 3.0 seconds; roll diameter, 5.35 inch (136 millimeters); roll length, 62.5 feet (19.1 meters).

Example 9.

A single ply towel was made as described in Example 7 except the former consistency was approximately 0.25 percent.

The resulting finished product had the following properties: basis weight, 22.2 pounds per 2880 square feet (37.8 grams per square meter); MD tensile, 2940 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2210 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 16.5 percent; CD stretch 10.0 percent; MD slope, 6.65 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 8.50 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 3.00; single sheet caliper, 0.030 inch (0.76 mm); roll bulk, 17.8 cubic centimeters per gram; roll firmness, 4.55 millimeters; roll bulk divided by roll firmness, 39.1 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 520 centimeters per gram; absorbent capacity, 6.0 grams water per gram fiber; absorbent rate, 2.8 seconds; roll diameter, 5.28 inch (134 millimeters); roll length, 62.5 feet (19.1 meters).

Example 10.

A single ply towel as described in Example 9 except the resulting basesheet was calendered at a fixed gap of 0.007 inch (0.178 millimeter).

The resulting finished product had the following properties: basis weight, 22.3 pounds per 2880 square feet (37.8 grams per square meter); MD tensile, 3220 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2370 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 18.5 percent; CD stretch 10.5 percent; MD slope, 6.06 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 8.67 kilograms per

3 inches (76.2 millimeters) sample width; geometric mean stiffness, 2.63; single sheet caliper, 0.033 inch (0.84 mm); roll bulk, 18.4 cubic centimeters per gram; roll firmness, 4.9 millimeters; roll bulk divided by roll firmness, 37.6 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 450 centimeters per gram;

- 5 absorbent capacity, 5.89 grams water per gram fiber; absorbent rate, 2.8 seconds; roll diameter, 5.35 inch (136 millimeters); roll length, 62.5 feet (19.1 meters).

Example 11.

A single ply towel was made as described in Example 2 except the resulting

- 10 basesheet was not calendered.

The resulting finished product had the following properties: basis weight, 23.6 pounds per 2880 square feet (40.1 grams per square meter); MD tensile, 2570 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2290 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 19.9 percent; CD stretch 12.6 percent; MD slope,

- 15 8.98 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 10.2 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 3.93; single sheet caliper, 0.045 inch (1.14 mm); roll bulk, 20.9 cubic centimeters per gram; roll firmness, 4.35 millimeters; roll bulk divided by roll firmness, 48.1 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 420 centimeters per gram;
- 20 absorbent capacity, 6.56 grams water per gram fiber; absorbent rate, 3.2 seconds; roll diameter, 5.95 inch (151 millimeters); roll length, 65.0 feet (19.7 meters).

Example 12.

A single ply towel as described in Example 3 except the resulting basesheet was

- 25 not calendered.

The resulting finished product had the following properties: basis weight, 22.5 pounds per 2880 square feet (38.3 grams per square meter); MD tensile, 2600 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2410 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 19.6 percent; CD stretch 13.2 percent; MD slope,

- 30 12.3 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 8.74 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 4.13; single sheet caliper, 0.043 inch (1.09 mm); roll bulk, 23.2 cubic centimeters per gram; roll firmness, 4.9 millimeters; roll bulk divided by roll firmness, 47.3 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 430 centimeters per gram;

absorbent capacity, 6.41 grams water per gram fiber; absorbent rate, 2.2 seconds; roll diameter, 6.1 inch (155 millimeters); roll length, 65.1 feet (19.7 meters).

Example 13.

- 5 A single ply towel as described in Example 7 except the resulting basesheet was not calendered.

The resulting finished product had the following properties: basis weight, 22.7 pounds per 2880 square feet (38.6 grams per square meter); MD tensile, 3430 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2620 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 21.6 percent; CD stretch 10.7 percent; MD slope, 7.67 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 14.2 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 3.46; single sheet caliper, 0.042 inch (1.07 mm); roll bulk, 21.7 cubic centimeters per gram; roll firmness, 4.40 millimeters; roll bulk divided by roll firmness, 49.2 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 460 centimeters per gram; absorbent capacity, 5.98 grams water per gram fiber; absorbent rate, 2.8 seconds; roll diameter, 5.90 inch (150 millimeters); roll length, 63.5 feet (19.2 meters).

Example 14 (Control).

- 20 A single ply towel as described in Example 1 except the transfer fabric was an AM 2164-B33 and the resulting basesheet was calendered at a fixed gap of 0.011 inch (27.9 mm).

The resulting finished product had the following properties: basis weight, 22.4 pounds per 2880 square feet (38.1 grams per square meter); MD tensile, 2670 grams per 3 inches (76.2 millimeters) sample width; CD tensile, 2170 grams per 3 inches (76.2 millimeters) sample width; MD stretch, 19.1 percent; CD stretch 9.0 percent; MD slope, 19.6 kilograms per 3 inches (76.2 millimeters) sample width; CD slope, 10.6 kilograms per 3 inches (76.2 millimeters) sample width; geometric mean stiffness, 5.98; single sheet caliper, 0.033 inch (0.84 mm); roll bulk, 17.0 cubic centimeters per gram; roll firmness, 10.4 millimeters; roll bulk divided by roll firmness, 16.3 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 200 centimeters per gram; absorbent capacity, 6.0 grams water per gram fiber; absorbent rate, 2.0 seconds; roll diameter, 5.19 inch (1325 millimeters); roll length, 60.0 feet (18.2 meters).

Example 15

A single ply towel as described in Example 1 except the SHWK was replaced with unrefined NSWK, the former was a Beloit suction roll former, the forming fabric was AM 2164-A33, the furnish contained 10% own-make broke, Kymene 557LX was added at only 7 kg/mton, carrier fabrics 22 and 25 were not in place, the base sheet was calendered with steel/steel rolls at a fixed gap of 0.015 inches, and the finished product was calendered with steel/steel rolls at a fixed gap of 0.008 inches.

10

The resulting finished product had the following properties: basis weight 25.0 pounds per 2880 square feet; MD tensile, 2950 grams per 3 inch width; CD tensile, 2450 grams per 3 inch width; MD stretch, 19.5 percent; CD stretch, 9.5%; MD slope 9.4 kilograms per 3 inches, CD slope 9.3 kilograms per 3 inches, geometric mean stiffness 3.48, single sheet caliper, 0.032 inch; roll bulk, 16.1 cubic centimeters per gram; roll firmness, 4.50 millimeters; roll bulk divided by roll firmness, 35.8 square centimeters per gram; roll bulk divided by roll firmness divided by single sheet caliper, 440 centimeters per gram; absorbent capacity, 5.9 grams water per gram fiber; absorbent rate, 2.2 seconds; roll diameter, 5.30 inch; roll length, 62 feet; wipe-dry, 983; horizontal wicking rate, 2.86 centimeters per sec<sup>1/2</sup>.

The following Table summarizes the properties of current competitive products for comparison.

**TABLE 1****1Q1998****averages**current  
commercial  
towels

mfg.

basis wt.  
lbs/2880 ft2MD tensile  
grams/3"CD tensile  
grams/3"MD stretch  
percentCD stretch  
percent

Bounty	Procter & Gamble	25.3	3105	2334	12.5	9.2
Sparkle	Georgia- Pacific	26.8	3281	2572	9.9	4
Brawny	Ft. James	30	3802	2607	14.1	4.1
Green	Ft. James	29.2	3508	2682	12.3	5.4
Forest						
So-Dri	Ft. James	28.6	3467	2726	9.5	4
Hi-Dri	Kimberly- Clark	19.7	2190	1147	11.7	6.7
Chelsea	Ft. James	28.6	3766	2293	18.5	4.7



**TABLE 1**

**1Q1998**

**averages**

current

commercial

towels

mfg.

MD slope  
kg/3"

CD slope  
kg/3"

geometric  
mean  
stiffness

single  
sheet  
caliper  
inches

roll bulk  
cc/gram

roll  
firmness  
millimeters

Bounty	Procter & Gamble	16.76	15.96	6.1	0.0254	15.6	8.61
Sparkle	Georgia-Pacific	29.43	40.31	11.9	0.0221	13.3	8.71
Brawny	Ft. James	24.94	39.96	10	0.0243	12.2	8.99
Green	Ft. James	16.3	27.76	6.9	0.0263	15.4	9.45
Forest							
So-Dri	Ft. James	24.76	37.18	9.9	0.0275	16.3	8.73
Hi-Dri	Kimberly-Clark	21.91	22.82	14.1	0.0256	18.2	11.04
Chelsea	Ft. James	21.94	39.51	12.6	0.023	10.7	7.36

**TABLE 1****1Q1998****averages****current****commercial****towels****mfg.**roll bulk  
divided by  
roll firmness  
cm<sup>2</sup>/gramroll bulk  
divided by  
roll firmness  
divided by  
single  
sheet caliper  
cm./gramabsorbent  
capacity  
g. water  
divided by  
g. fiberabsorbent  
rate  
secondswipe-dry  
cm<sup>2</sup>horizontal  
wicking  
rate  
cm/sec<sup>1/2</sup>

Bounty	Procter & Gamble	18.1184669	280.8367986	10.16	3.5	233	1.73
Sparkle	Georgia-Pacific	15.26980482	272.0241711	4.65	3.1	0	1.55
Brawny	Ft. James	13.57063404	219.8670496	4.15	4.5	383	1.1
Green	Ft. James	16.2962963	243.9492275	4.34	6.1	208	0.64
Forest							
So-Dri	Ft. James	18.67124857	267.3049187	4.2	6.1	67	0.64
Hi-Dri	Kimberly-Clark	16.48550725	253.5295775	4.88	2.9	0	0.56
Chelsea	Ft. James	14.53804348	248.8538767	4.58	4.4	0	0.99

It will be appreciated that the foregoing examples, given for purposes of illustration, are not to be construed as limiting the scope of this invention, which is defined by the following claims and all equivalents thereto.

094433-11

We claim:

1. A roll of tissue having a roll bulk of 16 cubic centimeters or greater per gram and a roll firmness of 8 millimeters or less.
2. The roll of tissue of claim 1 wherein the roll firmness is about 7 millimeters or less.
3. The roll of tissue of claim 1 wherein the roll firmness is about 6 millimeters or less.
4. The roll of tissue of claim 1 wherein the roll firmness is from about 4 to about 7 millimeters.
5. The roll of tissue of claim 1 wherein the roll bulk is about 17 cubic centimeters or greater per gram and the roll firmness is about 6 millimeters or less.
6. The roll of tissue of claim 1 wherein the roll bulk is from about 17 cubic centimeters per gram to about 20 cubic centimeters per gram and the roll firmness is from about 4 millimeters to about 7 millimeters.
7. A roll of tissue having a roll bulk/roll firmness ratio of 20 or more square centimeters per gram and a single sheet caliper of from about 0.02 to about 0.05 inch.
8. The roll of tissue of claim 7 wherein the roll bulk/roll firmness ratio is about 25 or more square centimeters per gram.
9. The roll of tissue of claim 7 wherein the roll bulk/roll firmness ratio is from about 25 to about 55 square centimeters per gram.
10. The roll of tissue of claim 9 wherein the single sheet caliper is from about 0.025 to about 0.040 inch.
11. A roll of tissue having a roll bulk/roll firmness ratio of 20 or more square centimeters per gram and a geometric mean stiffness of about 8 or less.

12. The roll of tissue of claim 11 wherein the roll bulk/roll firmness ratio is about 25 or more square centimeters per gram.
13. The roll of tissue of claim 11 wherein the roll bulk/roll firmness ratio is from about 25 to about 55 square centimeters per gram.
14. The roll of tissue of claim 13 wherein the geometric mean stiffness is about 5 or less.
15. The roll of tissue of claim 13 wherein the geometric mean stiffness is from about 2 to about 5.
16. A roll of tissue having a roll bulk/roll firmness/single sheet caliper ratio of about 350 or more centimeters per gram and a geometric mean stiffness of about 8 or less.
17. The roll of tissue of claim 16 wherein the roll bulk/roll firmness/single sheet caliper ratio is about 390 or more centimeters per gram.
18. The roll of tissue of claim 16 wherein the roll bulk/roll firmness/single sheet caliper ratio is about 430 or more centimeters per gram.
19. The roll of tissue of claim 16 wherein the roll bulk/roll firmness/single sheet caliper ratio is from about 350 to about 550 centimeters per gram.
20. The roll of tissue of claim 19 wherein the geometric mean stiffness is from about 2 to about 5.
21. The roll of tissue of claim 1, 7, 11 or 16 wherein the tissue has an absorbent capacity of 5 or more grams of water per gram of fiber.
22. The roll of tissue of claim 1, 7, 11 or 16 wherein the tissue has an absorbent rate of about 4 seconds or less.
23. A throughdried tissue sheet having an air side and a dryer side, the dryer side of the sheet having parallel discontinuous rows of machine direction dominant

elevated pillow-like regions, wherein the discontinuities in the rows of elevated pillow-like regions are cross-machine direction dominant troughs that appear as cross-machine dominant bar-like protrusions on the air side of the sheet.

24. A throughdried tissue sheet comprising generally parallel rows of elevated pillow-like regions running at an angle of from about  $0.05^\circ$  to about  $2^\circ$  relative to the machine direction of the sheet.
25. The tissue sheet of claim 24 wherein the angle is from about  $0.05^\circ$  to about  $1^\circ$ .
26. The tissue sheet of claim 24 wherein the angle is from about  $0.1^\circ$  to about  $0.6^\circ$ .
27. A method of making a throughdried tissue sheet comprising (a) depositing an aqueous suspension of papermaking fibers onto a forming fabric to form a wet web; (b) dewatering the wet web to a consistency from about 20 to about 30 percent; (c) transferring the dewatered web from the forming fabric to a transfer fabric traveling at a speed from about 10 to about 80 percent slower than the forming fabric; (d) transferring the web to a throughdrying fabric having from about 5 to about 300 impression knuckles per square inch which are raised at least about 0.005 inch above the plane of the fabric, wherein the web is macroscopically rearranged to conform to the surface of the throughdrying fabric; and (e) throughdrying the web, wherein the sheet side of the transfer fabric contains cross-machine direction dominant troughs which impart cross-machine direction bar-like protrusions to the air side of the tissue sheet.

28. A method making a throughdried tissue sheet comprising (a) depositing an aqueous suspension of papermaking fibers onto a forming fabric to form a wet web; (b) dewatering the wet web to a consistency from about 20 to about 30 percent; (c) transferring the dewatered web from the forming fabric to a transfer fabric traveling at a speed from about 10 to about 80 percent slower than the forming fabric; (d) transferring the web to a throughdrying fabric having from about 5 to about 300 impression knuckles per square inch which are raised at least about 0.005 inch above the plane of the fabric, wherein the web is macroscopically rearranged to conform to the surface of the throughdrying fabric; and (e) throughdrying the web, wherein the throughdrying fabric has an offset seam at an angle of about 2 degrees or less relative to the cross-machine direction of the fabric.
29. The method of claim 28 wherein the offset seam angle is about 1 degree or less relative to the cross-machine direction of the sheet.
30. The method of claim 28 wherein the offset seam angle is from about 0.05 to about 1 degree relative to the cross-machine direction of the sheet.
31. The method of claim 28 wherein the offset seam angle is from about 0.1 to about 0.6 degree relative to the cross-machine direction of the sheet.
32. A method of winding a roll of tissue from a tissue sheet having a regular pattern of surface protrusions comprising oscillating the roll from side to side as the roll is being wound such that the surface protrusions of adjacent sheets within the roll are offset from each other, thereby reducing nesting and increasing the roll bulk/roll firmness ratio relative to a roll of the same sheet material wound without oscillating the roll.
33. A paper towel having a Horizontal Wicking rate of 2.0 centimeters per second  $\frac{1}{2}$  or greater.
34. The paper towel of claim 33 having a Horizontal Wicking rate of 2.3 centimeters per second  $\frac{1}{2}$  or greater.
35. The paper towel of claim 33 having a Horizontal Wicking rate of 2.5 centimeters per second  $\frac{1}{2}$  or greater.

36. The paper towel of claim having a Horizontal Wicking rate of 2.8 centimeters per second  $\frac{1}{2}$  or greater.
37. The paper towel of claim 33 having a Horizontal Wicking rate of from 2.0 to about 3.
38. The paper towel of claim 33 having a Horizontal Wicking rate of from about 2.2 to about 2.8.
39. A paper towel having a Wipe Dry area of from about 650 to 1000 square centimeters.
40. The paper towel of claim 39 having a Wipe Dry area of from about 700 to 1000 square centimeters.
41. The paper towel of claim 39 having a Wipe Dry area of from about 800 to 1000 square centimeters.
42. The paper towel of claim 39 having a Wipe Dry area of from about 900 to 1000 square centimeters.
43. A paper towel having a Horizontal Wicking rate of 2.0 centimeters per second  $\frac{1}{2}$  or greater and a Wipe Dry area of from about 650 to 1000 square centimeters.
44. The paper towel of claim 43 having a Wipe Dry area of from about 700 to 1000 square centimeters.
45. The paper towel of claim 43 having a Wipe Dry area of from about 800 to 1000 square centimeters.
46. The paper towel of claim 43 having a Wipe Dry area of from about 900 to 1000 square centimeters.
47. The paper towel of claim 46 having a Horizontal Wicking rate of from about 2.2 to about 2.8 centimeters per second  $\frac{1}{2}$ .





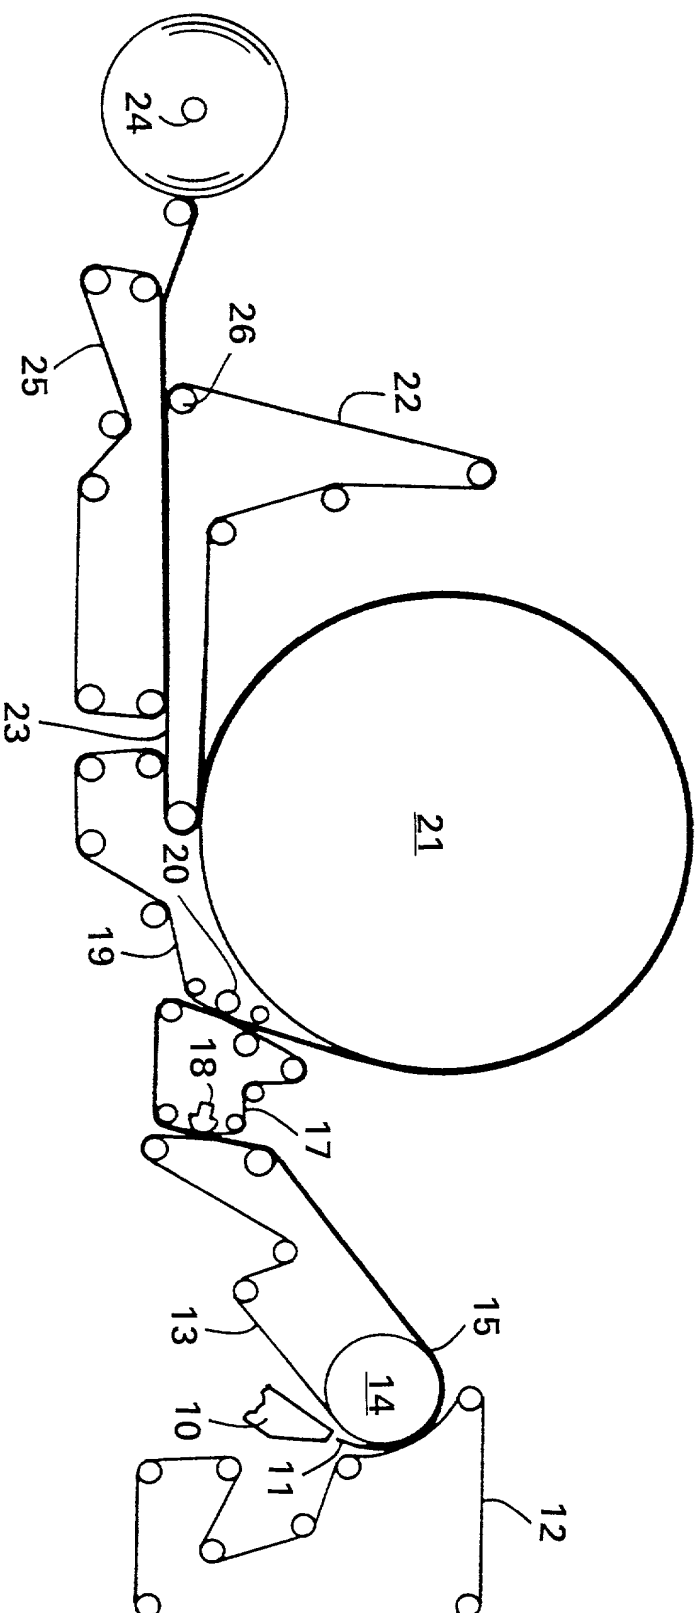
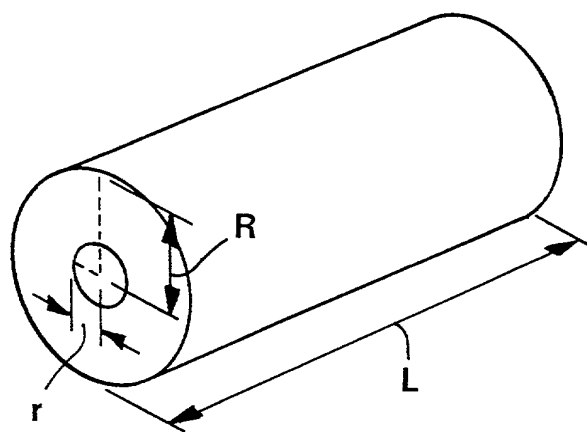


FIG. 1



**FIG. 2**

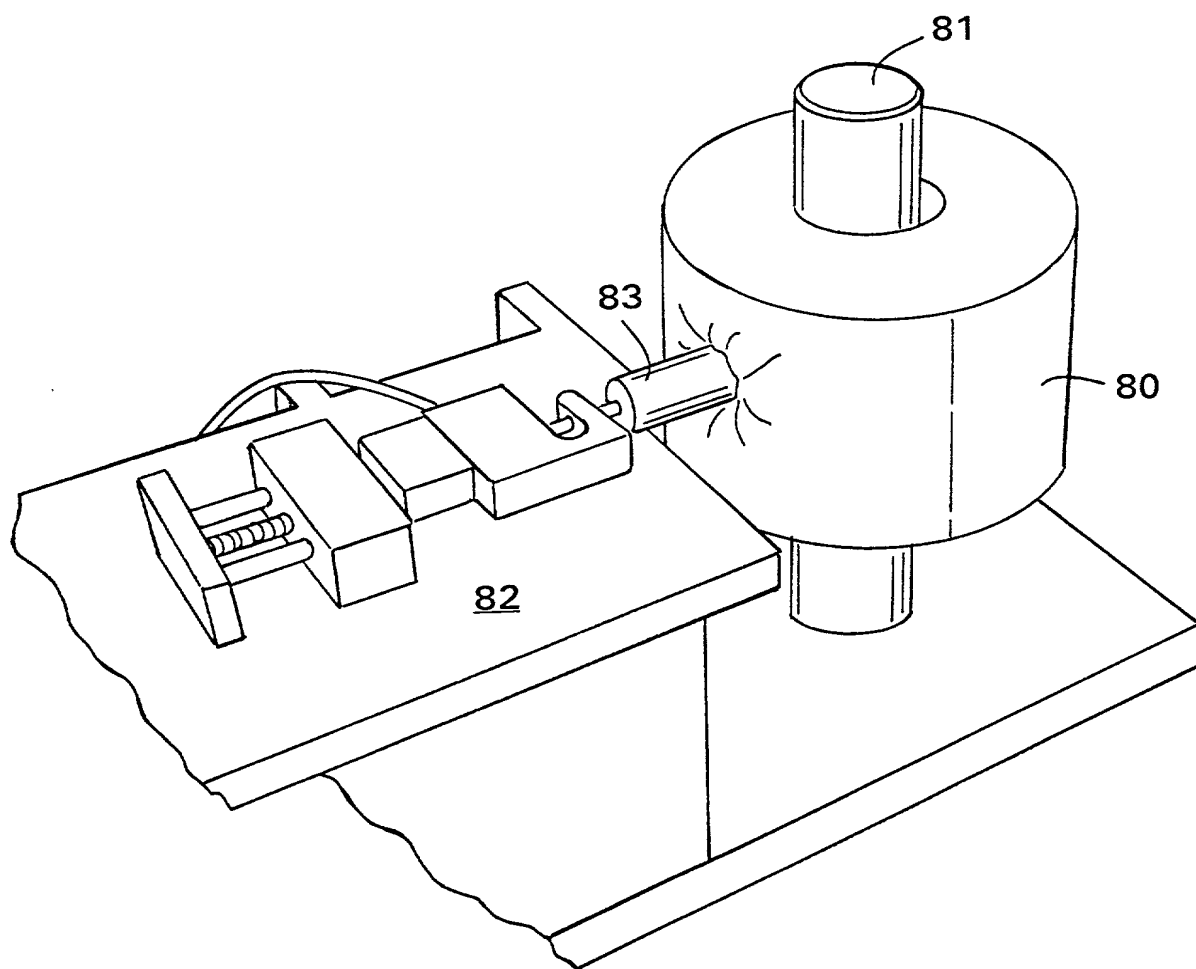


FIG. 3



**FIG. 4**

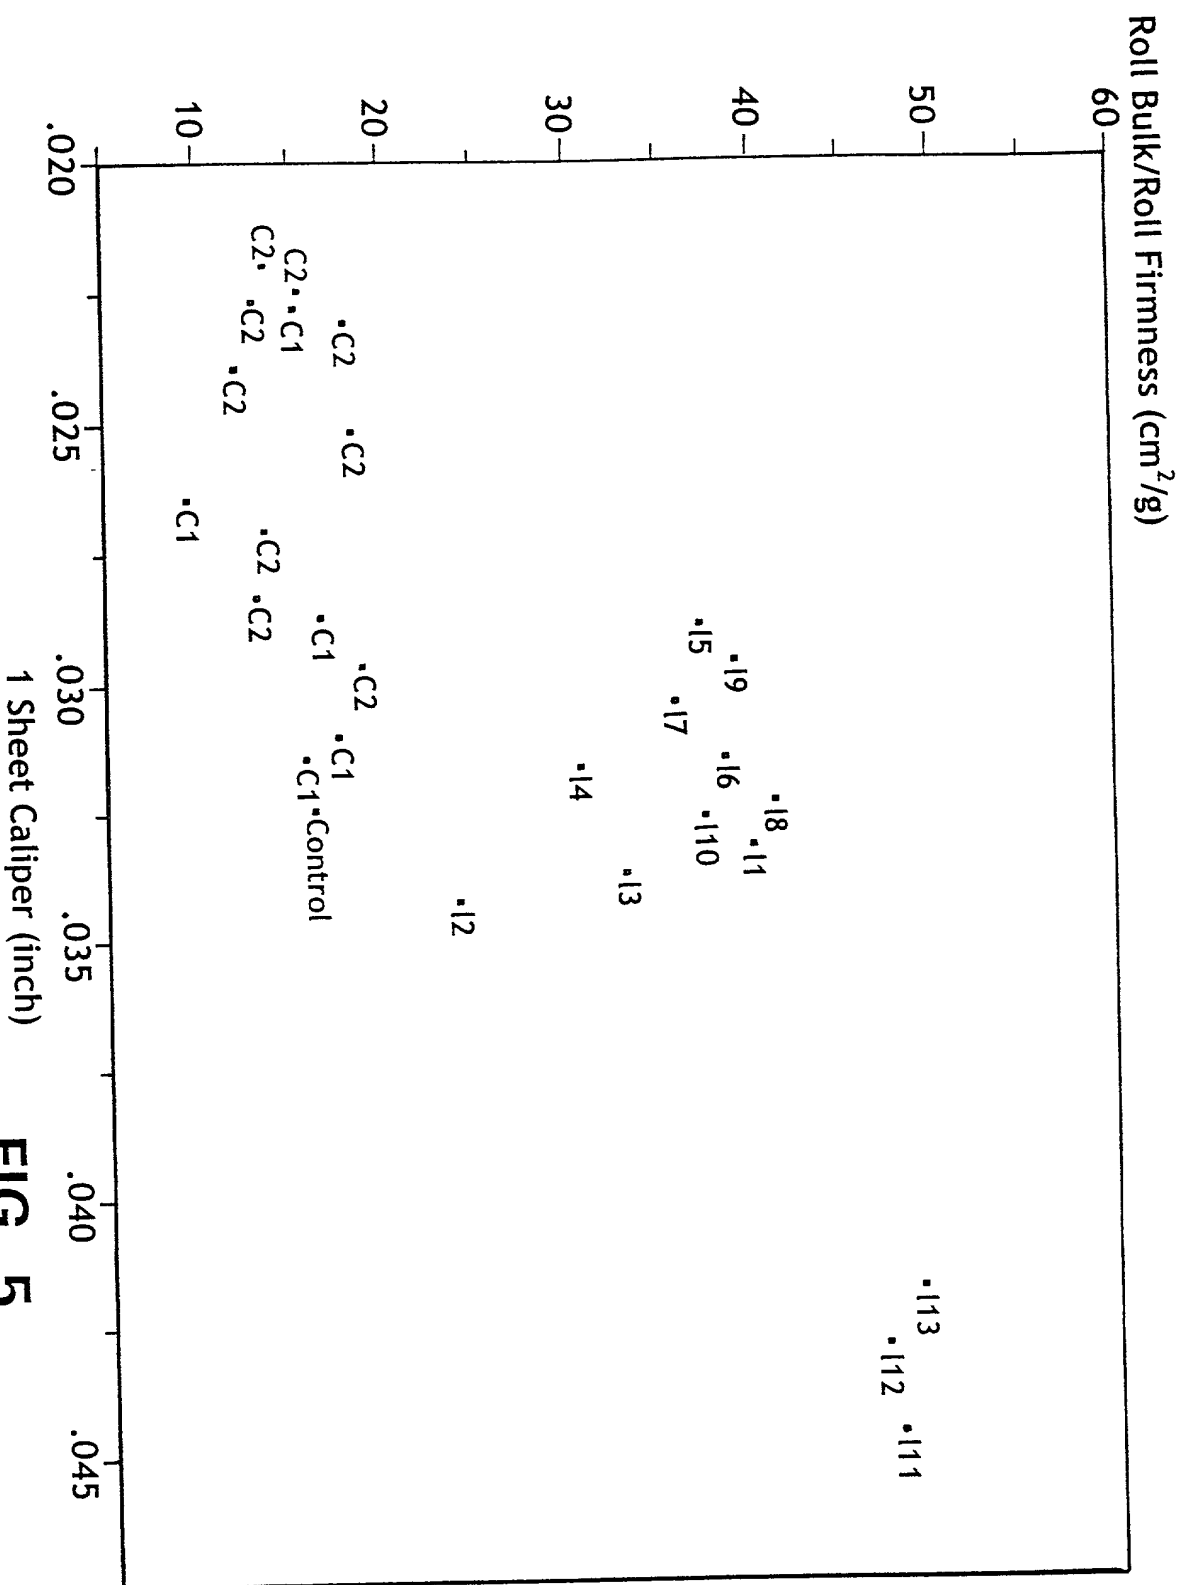


FIG. 5


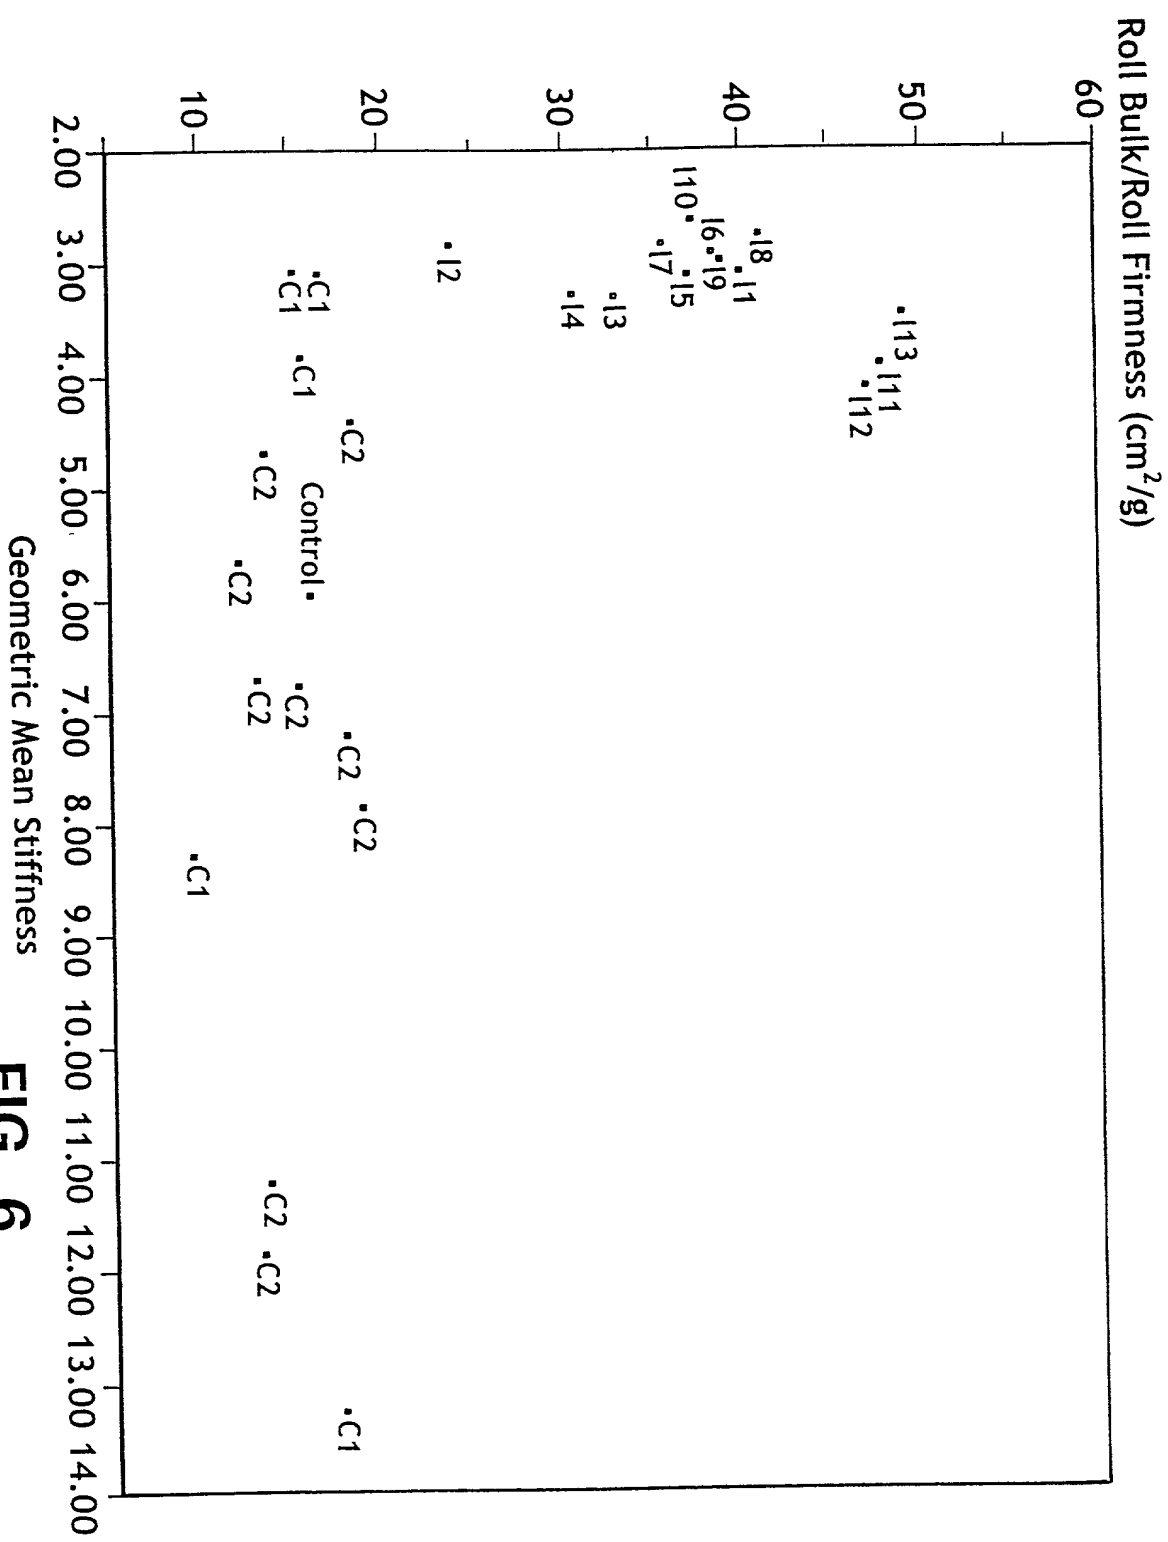


FIG. 6

Bulk/Firmness/1 Sheet Caliper

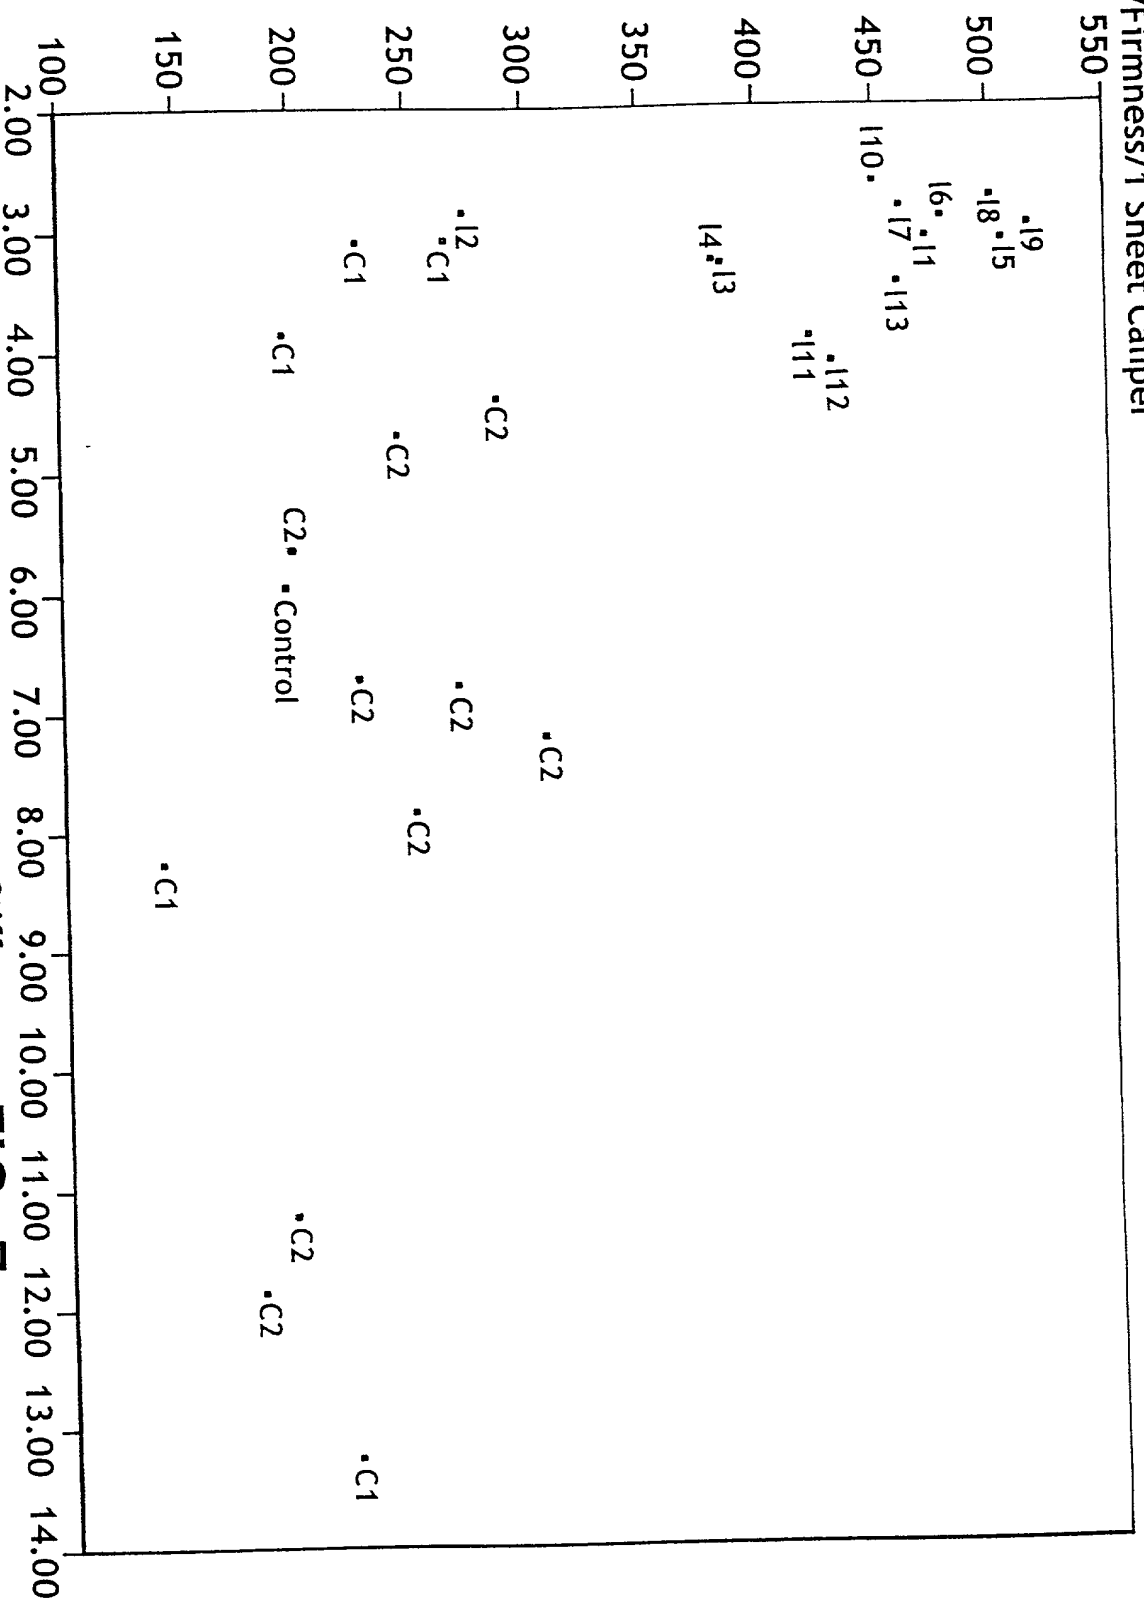

Geometric Mean Stiffness

FIG. 7



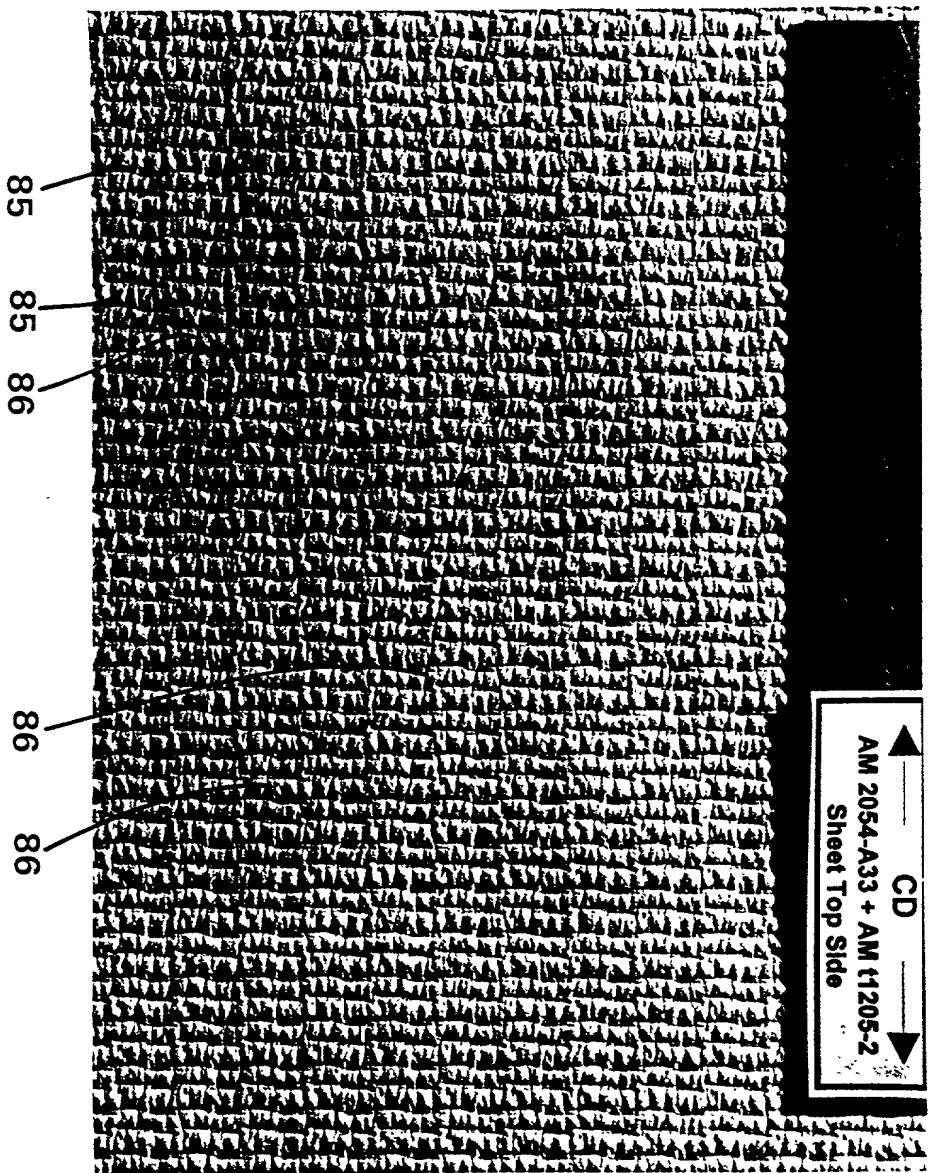


FIG. 8A

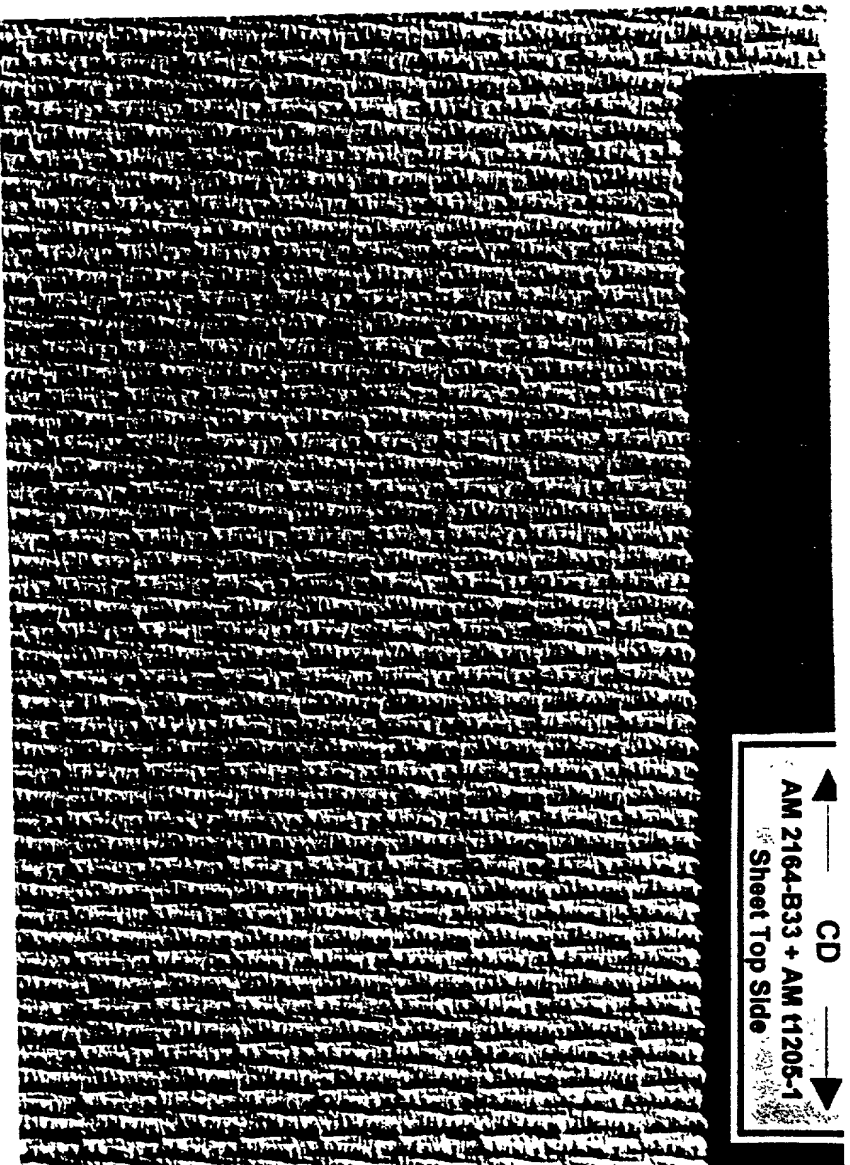


FIG. 8B

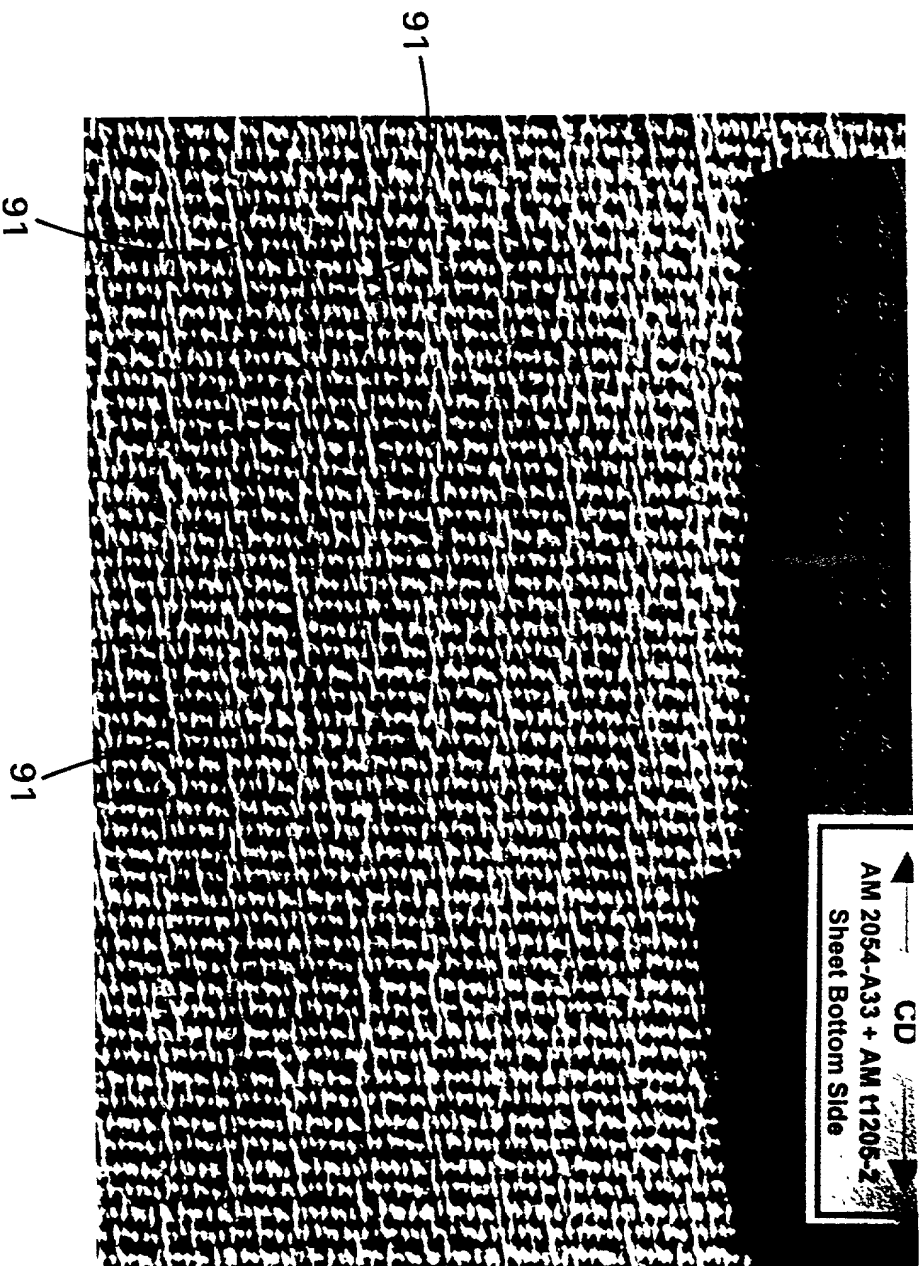


FIG. 9A

094461987 1.1.1799

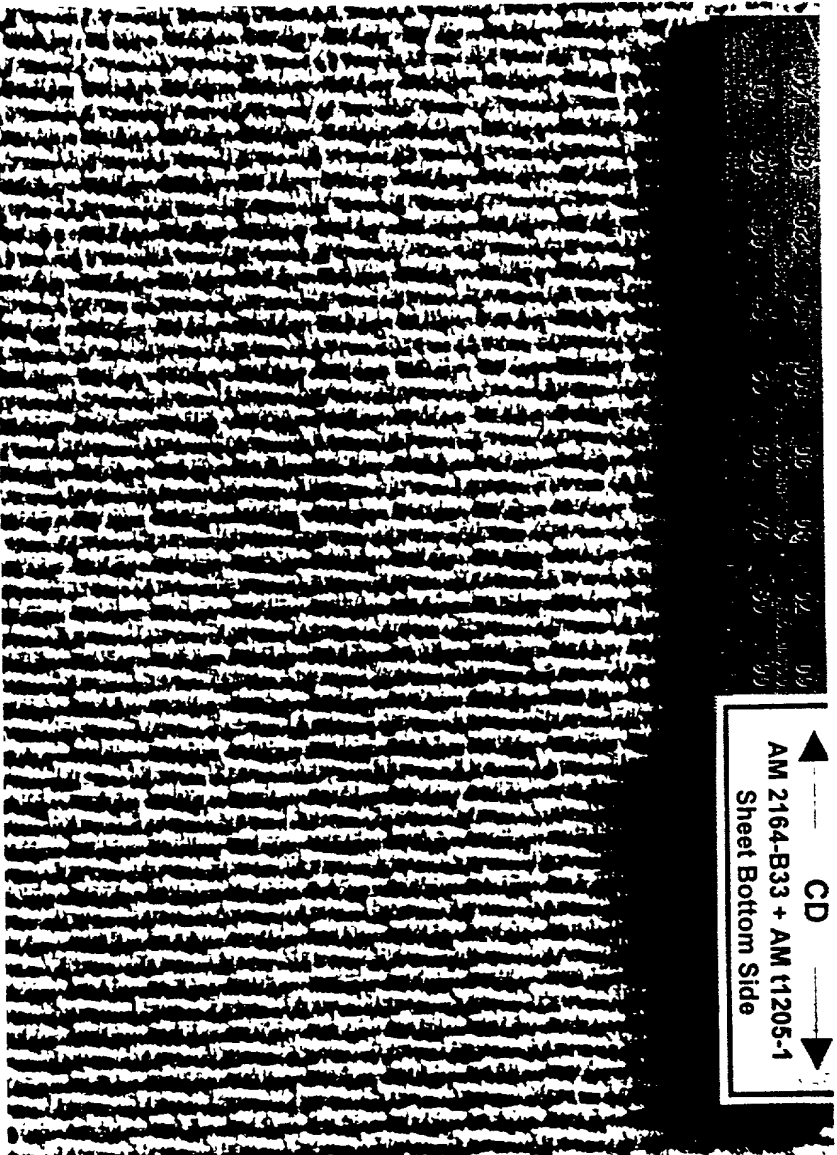


FIG. 9B

09444987 111799

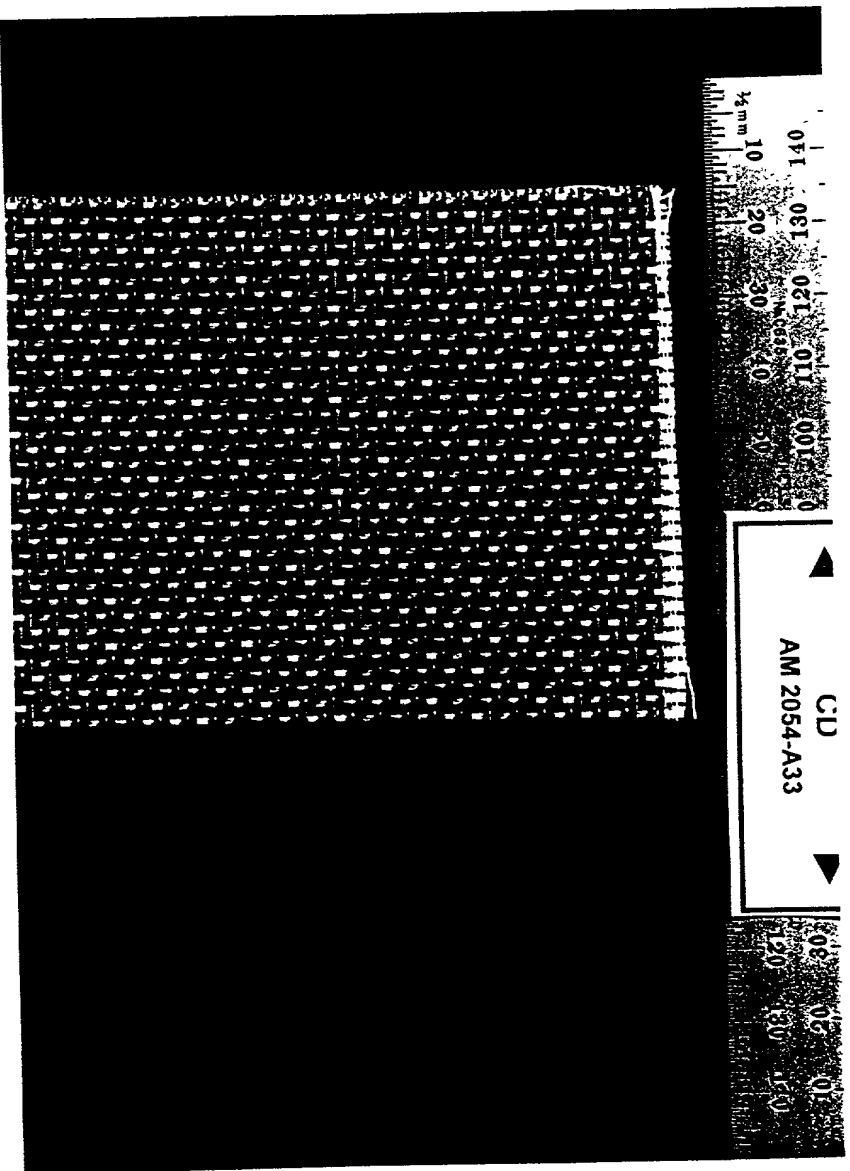


FIG. 10

09441987 11.11.99

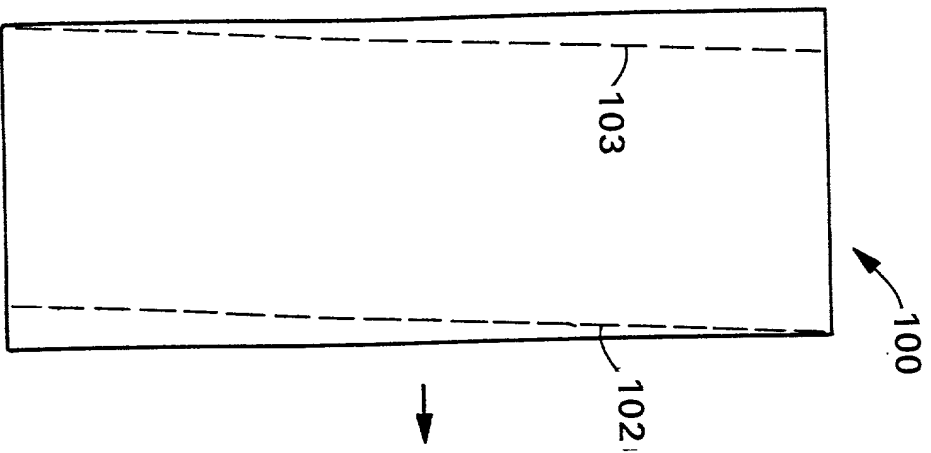


FIG. 11A

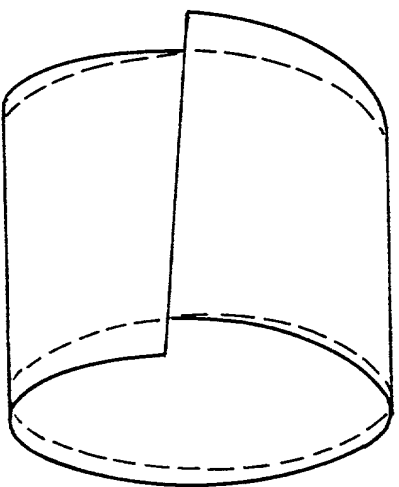


FIG. 11B

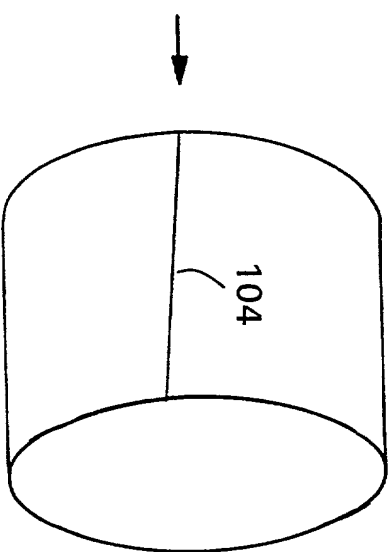


FIG. 11C

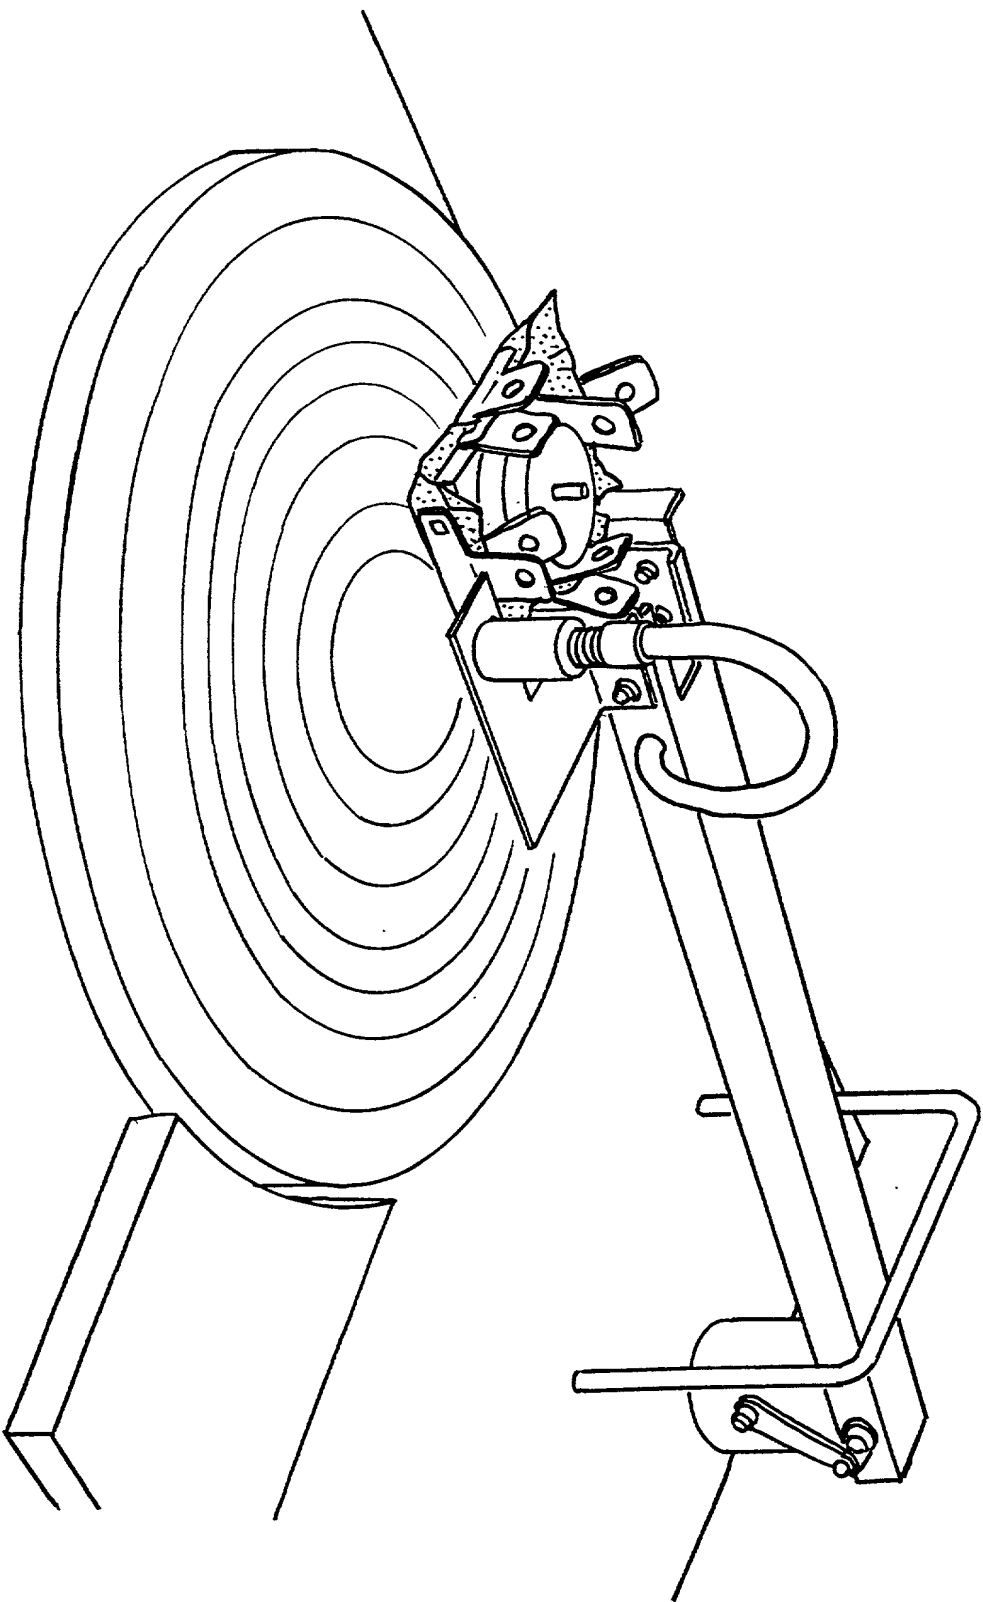


FIG. 12

U.S. Pat. No. 4,811,111

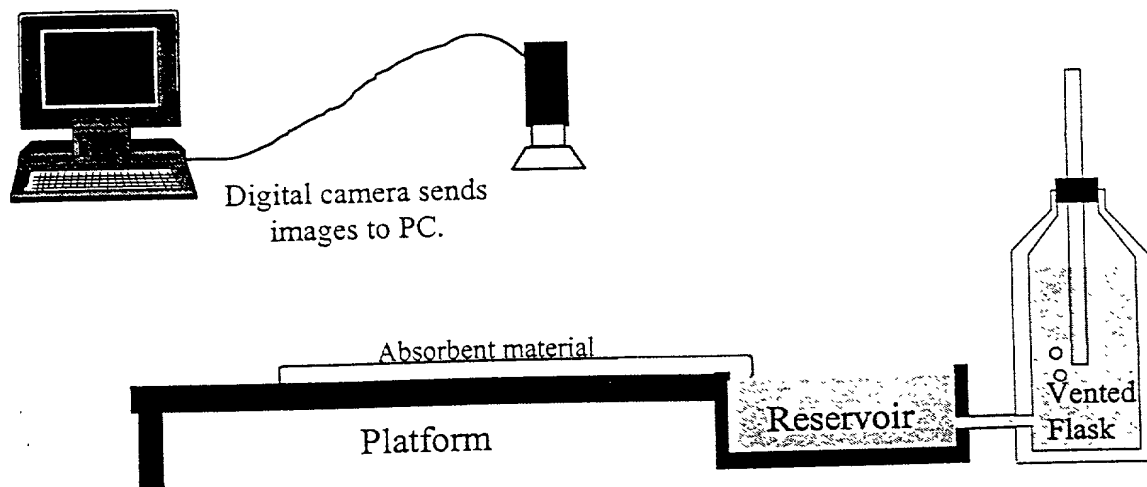


FIG. 13

Wicking Distance (cm)

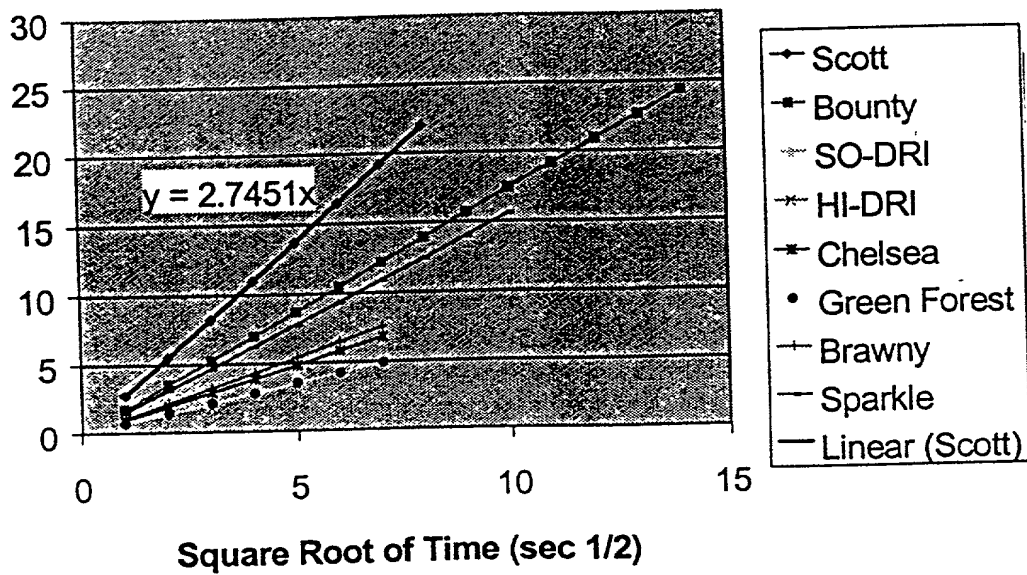


FIG. 14



## In the United States Patent and Trademark Office

Applicants: Mark A. Burazin et al.                      Docket No.: 13,497.2  
Serial No.: Unknown                                      Group: Unknown  
Filed: Herewith    Examiner: Unknown  
For: ROLLS OF TISSUE SHEETS HAVING IMPROVED PROPERTIES

Express Mail      EJ803479239US                      Date: November 17, 1999

### **Combined Declaration and Power of Attorney Continuation-In-Part Patent Application Joint Inventors**

ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Sir:

As the below-named inventors, we hereby declare that:

Our respective residence addresses, post office addresses and citizenship designations are as stated below, next to our names.

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought in the patent application entitled:

**ROLLS OF TISSUE SHEETS HAVING IMPROVED PROPERTIES**

the specification of which is attached hereto.

We hereby state that each of us has reviewed and understands the contents of the above-identified specification, including the claims and any accompanying drawings, as amended by any amendment specifically referred to in the oath or declaration

We acknowledge our duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, section 1.56.

We further acknowledge our duty to disclose information which is material to the examination of this application and which became available between the filing date of prior application serial number 09/166,863 entitled "ROLLS OF TISSUE SHEETS HAVING IMPROVED PROPERTIES" and the national or PCT international filing date of the present continuation-in-part application.

As the named inventors, we hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected herewith:

Patricia A. Charlier, Reg. No. 38840; Thomas J. Connelly, Reg. No. 28404; Gregory E. Croft, Reg. No. 27542; Jeffrey B. Curtin, Reg. No. 37601; Jeremiah J. Duggan, Reg. No. 24470; Steven D. Flack, Reg. No. 40608; Thomas M. Gage, Reg. No. 33385; Scott B. Garrison, Reg. No. 39,198; Joseph P. Harps, Reg. No. 28854; William D. Herrick, Reg. No. 25468; Kyle K. Kappes, Reg. No. 34846; John P. Kirby, Jr., Reg. No. 25348; Nancy M. Klembus, Reg. No. 40051; Nicholas N. Leach, Reg. No. 31776; Thomas J. Mielke, Reg. No. 31399; Douglas L. Miller, Reg. No. 30406; Lisa J. Moyles, Reg. No. 40737; Thomas M. Parker, Reg. No. 42062; Sebastian C. Pugliese III, Reg. No. 42091; James B. Robinson, Reg. No. 34912; Karl V. Sidor, Reg. No. 32597; Douglas H. Tulley, Reg. No. 34743; Patrick C. Wilson, Reg. No. 31893; and Paul Y. Yee, Reg. No. 29460.

Please send all correspondence to Gregory E. Croft, Kimberly-Clark Worldwide, Inc., 401 North Lake Street, Neenah, Wisconsin 54956.

Our representative may be reached at: (920) 721-3616.

We hereby declare that:

1. All statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and
2. These statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of this application or any patent issued thereon.

First Named Inventor's Full Name:

Mark Alan Burazin

First Named Inventor's Signature:

Date of Execution of this Document by First Named Inventor:

Date:

First Named Inventor's Country of Citizenship:

United States of America

817 S. Daybreak Drive

Appleton, Wisconsin 54915

First Named Inventor's Residence Address:

First Named Inventor's Post Office Address:

Same as Residence Address

Second Named Inventor's Full Name:

Edward Joseph VanRengen

Second Named Inventor's Signature:

Date of Execution of this Document by Second Named Inventor:

Date:

Second Named Inventor's Country of Citizenship:

United States of America

31 Lamplighter Court

Appleton, Wisconsin 54914

Second Named Inventor's Residence Address:

Second Named Inventor's Post Office Address:

Same as Residence Address

Third Named Inventor's Full Name:

Kenneth Curtis Larson

Third Named Inventor's Signature:

Date of Execution of this Document by Third Named Inventor:

Date:

Third Named Inventor's Country of Citizenship:

United States of America

1500 S. Weimar Street

Appleton, Wisconsin 54915

Third Named Inventor's Residence Address:

Third Named Inventor's Post Office Address:

Same as Residence Address

Fourth Named Inventor's Full Name:

Jerome Steven Veith

Fourth Named Inventor's Signature:

Date of Execution of this Document by Fourth Named Inventor:

Date:

Fourth Named Inventor's Country of Citizenship:

United States of America

1260 Southfield Drive

Menasha, Wisconsin 54952

Fourth Named Inventor's Residence Address:

Fourth Named Inventor's Post Office Address:

Same as Residence Address

Fifth Named Inventor's Full Name:

Ralph L. Anderson

Fifth Named Inventor's Signature:

Date of Execution of this Document by Fifth Named Inventor:

Date:

Fifth Named Inventor's Country of Citizenship:

United States of America

5074 Wood Haven Court

Marietta, Georgia 30062

Fifth Named Inventor's Residence Address:

Fifth Named Inventor's Post Office Address:

Same as Residence Address

Sixth Named Inventor's Full Name:

Michael William Veith

Sixth Named Inventor's Signature:

Date of Execution of this Document by Sixth Named Inventor:

Date:

Sixth Named Inventor's Country of Citizenship:

United States of America

1102 W. 7th Avenue

Oshkosh, Wisconsin 54902

Sixth Named Inventor's Residence Address:

Sixth Named Inventor's Post Office Address:

Same as Residence Address